


TADANO MODEL ATF220G-5 - 250 TON CAPACITY

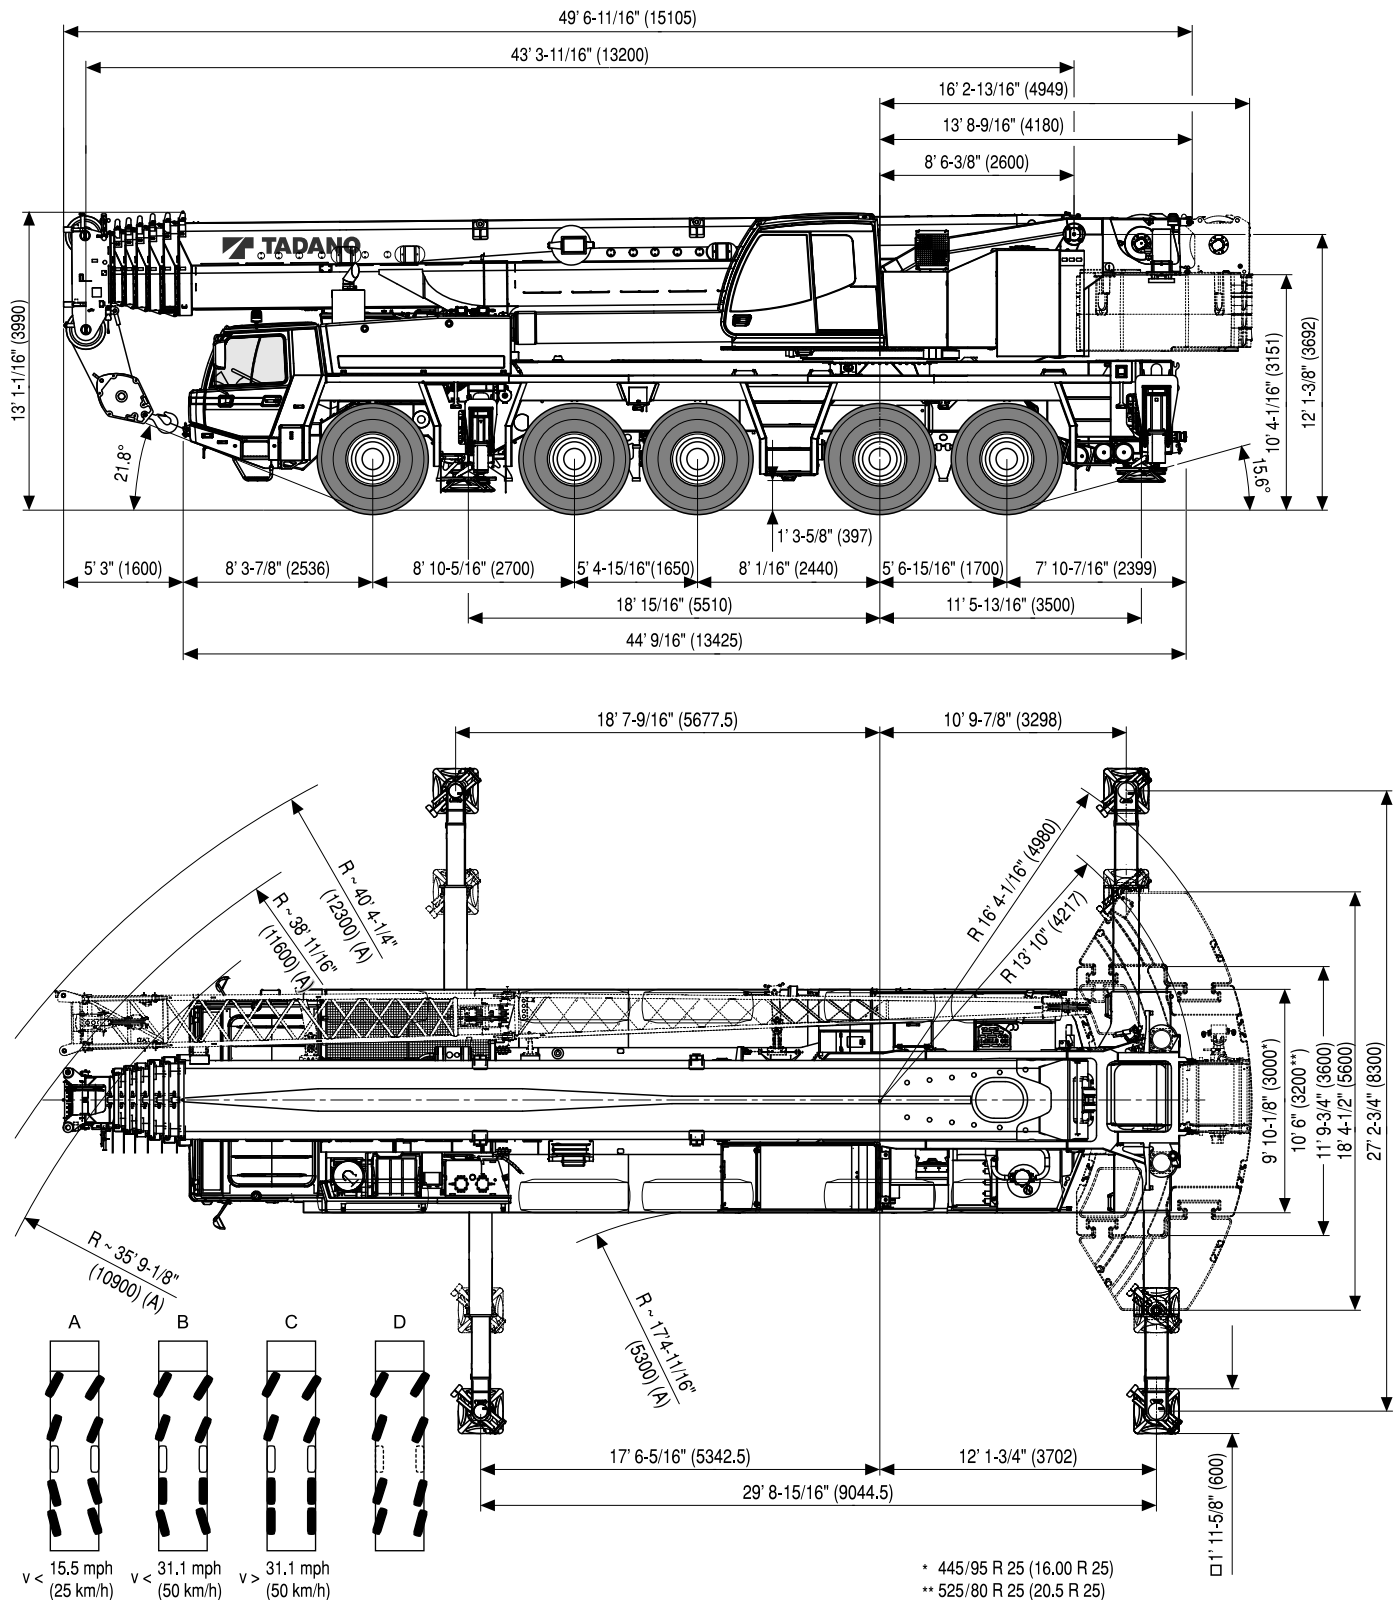

STERLING CRANE

Weights / Working speeds / Pesos / Velocidades de trabajo

	Axle Eje	1	2	3	4	5	Total weight Peso total
	(t)	12	12	12	12	12	60

 * Rams horn * Gancho doble	Lifting capacity Capacidad de elevación	Sheaves Poleas	Parts of line Ramales de cable	Weight Peso
	160 t*	9	19	3,527.4 lbs
	125 t*	7	15	2,976.2 lbs
	80 t*	5	11	2,535.3 lbs
	63 t*	3	7	1,873.9 lbs
	63 t	3	7	1,873.9 lbs
	25 t	1	3	992.1 lbs
	10 t	—	1	661.4 lbs



		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	R1	R2	
445/95 (16.00) mph	 	1.9	1.9	2.5	2.5	3.1	4.3	5.0	5.6	6.8	8.7	10.6	12.4	14.9	18.6	21.7	26.0	1.9	1.9	
		3.7	4.3	5.0	6.2	7.5	9.3	11.2	13.0	16.2	19.3	23.6	28.6	34.8	42.3	49.7	52.8	3.7	4.3	61%*
																				47%

* Off road range / * Con transmisión todo terreno

V+	Infinitely variable Infinitamente variable		Rope Cable	Max. single line pull Trio máximo por ramal
	0 - 420 ft/min 0 - 128 m/min	single line ramal simple	0.83' / 1,049.9' 21 mm / 320 m	98 kN
	0 - 420 ft/min 0 - 128 m/min	single line ramal simple	0.83' / 1,049.9' 21 mm / 320 m	98 kN
	0 - 1.2 min ⁻¹			
	-1.5° - +84°	approx. 50 s aproximadamente 50 s		
	43.3 ft - 223.1 ft 13.2 m - 68.0 m	approx. 500 s aproximadamente 500 s		