




LIFTING CHARTS - All Terrain Cranes

GROVE MODEL GMK6300L - 350 TON CAPACITY


Working range

Main boom

51 ft - 263 ft main boom

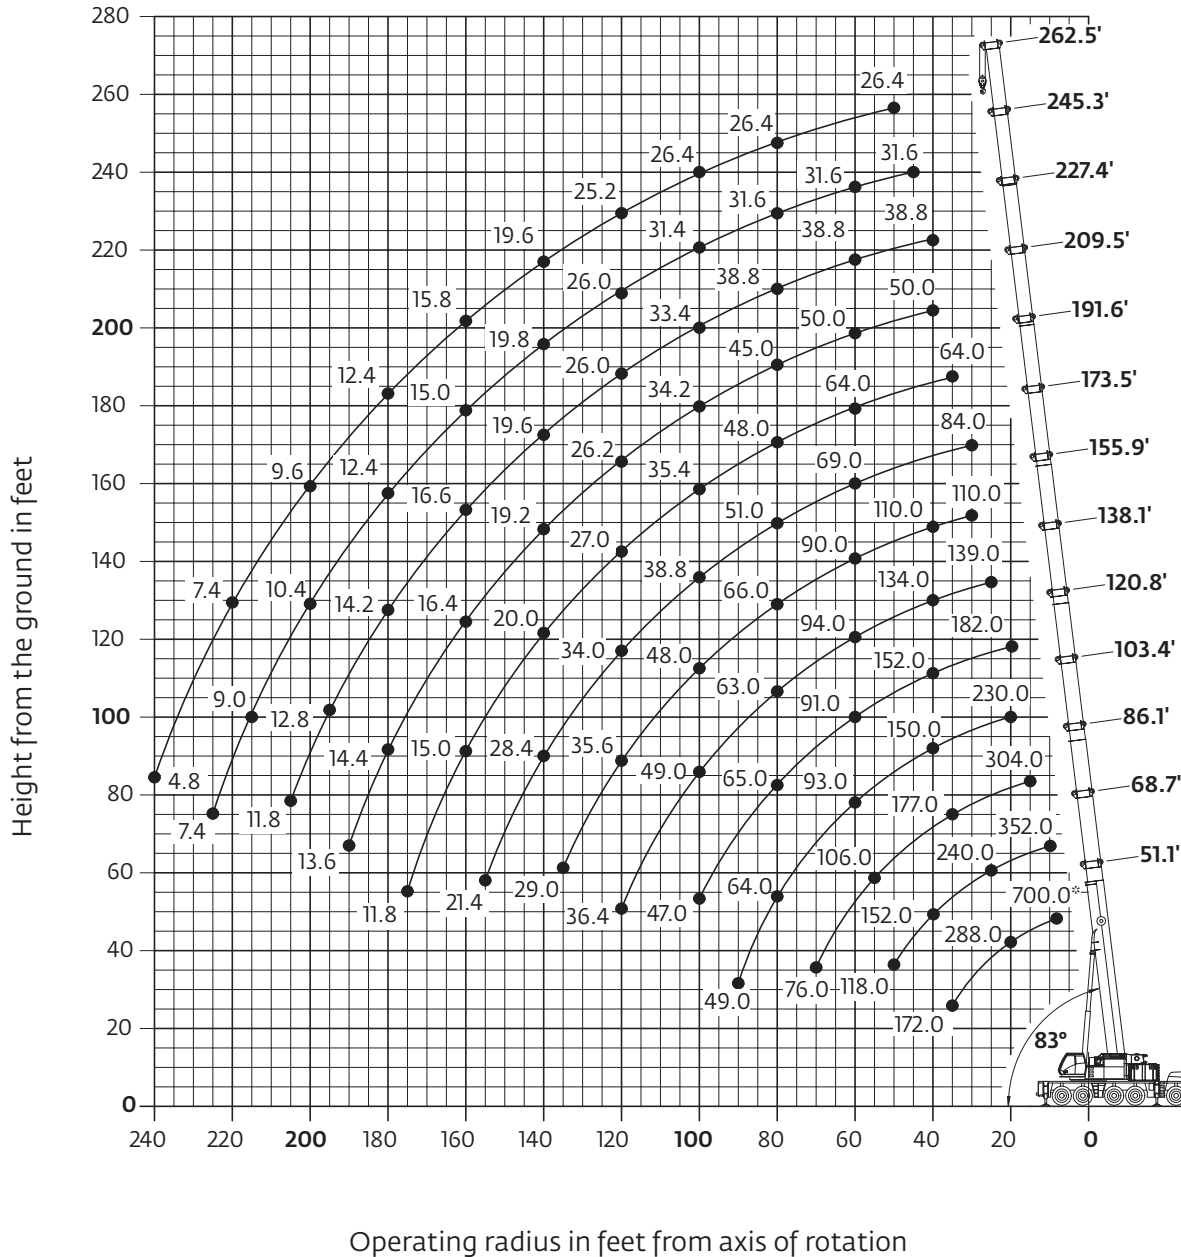

Hook heights shown in the working diagram do not consider loaded boom deflection.

	Hook block	H
	200 ton, 9 sheave	12.0 ft (3650 mm)
	160 ton, 7 sheave	12.0 ft (3650 mm)
	125 ton, 5 sheave	10.8 ft (3300 mm)
	80 ton, 3 sheave	10.8 ft (3300 mm)
	32 ton, 1 sheave	10.5 ft (3200 mm)
	12 ton, single line headache ball	8.0 ft (2450 mm)

STERLING CRANE

Load charts

Main boom

			
15,6 m - 80 m (51.1 ft - 262.5 ft)	92 500 kg (203,900 lb)	27 ft 9 in spread (100%)	360°

		Pounds x 1000
---	---	---------------

Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
8.0	700.0*												
10.0	418.0	352.0											
15.0	348.0	324.0	304.0										
20.0	288.0	276.0	260.0	230.0	182.0								
25.0	244.0	240.0	230.0	217.0	178.0	139.0							
30.0	207.0	207.0	202.0	192.0	178.0	139.0	110.0	84.0					
35.0	178.0	178.0	177.0	171.0	167.0	139.0			64.0				
40.0		152.0	152.0	150.0	152.0	134.0	110.0	84.0	64.0	50.0	38.8		
45.0		134.0	132.0	130.0	132.0	124.0	106.0	84.0	64.0	50.0	38.8	31.6	
50.0		118.0	118.0	116.0	116.0	115.0	101.0	81.0	64.0	50.0	38.8	31.6	26.4
55.0			106.0	105.0	103.0	105.0	95.0	75.0	64.0	50.0	38.8	31.6	26.4
60.0			94.0	93.0	91.0	94.0	90.0	69.0	64.0	50.0	38.8	31.6	26.4
65.0			85.0	84.0	82.0	84.0	84.0	64.0	59.0	50.0	38.8	31.6	26.4
70.0			76.0	76.0	76.0	76.0	79.0	59.0	55.0	50.0	38.8	31.6	26.4
75.0				69.0	71.0	69.0	72.0	55.0	52.0	48.0	38.8	31.6	26.4
80.0				64.0	65.0	63.0	66.0	51.0	48.0	45.0	38.8	31.6	26.4
85.0				61.0	60.0	58.0	60.0	47.0	44.0	42.4	38.8	31.6	26.4
90.0				49.0	55.0	55.0	56.0	43.2	40.6	39.4	37.2	31.6	26.4
95.0					51.0	52.0	51.0	40.4	37.8	36.6	35.4	31.6	26.4
100.0					47.0	49.0	48.0	38.8	35.4	34.2	33.4	31.4	26.4
105.0						46.0	44.0	37.4	32.8	31.8	31.6	30.0	26.4
110.0						43.0	41.0	36.2	30.8	30.0	29.6	28.8	26.4
115.0						40.2	38.2	35.0	28.8	28.0	27.8	27.4	26.4
120.0						36.4	35.6	34.0	27.0	26.2	26.0	26.0	25.2
125.0							33.0	33.0	25.4	24.6	24.6	24.6	24.2
130.0							30.6	32.0	23.8	23.0	23.0	23.4	22.6
135.0							29.0	30.6	22.0	21.2	21.2	21.6	20.8
140.0								28.4	20.0	19.2	19.6	19.8	19.6
145.0								26.6	18.2	18.2	18.8	18.0	18.6
150.0								24.8	17.2	17.6	18.0	17.0	17.6
155.0								21.4	16.0	17.0	17.2	16.0	16.8
160.0									15.0	16.4	16.6	15.0	15.8
165.0									14.0	15.8	16.0	14.4	14.8
170.0									13.2	15.4	15.4	13.8	14.0
175.0									11.8	14.8	14.8	13.0	13.2
180.0										14.4	14.2	12.4	12.4
185.0										14.0	13.8	12.0	11.8
190.0										13.6	13.2	11.4	11.0
195.0											12.8	10.8	10.4
200.0											12.2	10.4	9.6
205.0											11.8	9.8	9.0
210.0												9.4	8.4
215.0												9.0	8.0
220.0												8.6	7.4
225.0												7.4	6.8
230.0													6.4
235.0													5.6
240.0													4.8

* Over the rear with special equipment

Loads greater than 376,000 lb can only be lifted with special equipment.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane

Load charts

Main boom

			
15,6 m - 80 m (51.1 ft - 262.5 ft)	74 500 kg (164,200 lb)	27 ft 9 in spread (100%)	360°

		Pounds x 1000											
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
10.0	418.0	352.0											
15.0	348.0	324.0	304.0										
20.0	286.0	276.0	260.0	230.0	182.0								
25.0	240.0	240.0	230.0	217.0	178.0	139.0							
30.0	195.0	196.0	196.0	192.0	178.0	139.0	110.0	84.0					
35.0	163.0	165.0	164.0	162.0	165.0	139.0	110.0	84.0	64.0				
40.0		142.0	141.0	140.0	140.0	134.0	110.0	84.0	64.0	50.0	38.8		
45.0		122.0	123.0	122.0	120.0	121.0	106.0	84.0	64.0	50.0	38.8	31.6	
50.0		107.0	108.0	107.0	105.0	105.0	101.0	81.0	64.0	50.0	38.8	31.6	26.4
55.0			95.0	94.0	96.0	93.0	94.0	75.0	64.0	50.0	38.8	31.6	26.4
60.0			85.0	84.0	86.0	83.0	84.0	69.0	64.0	50.0	38.8	31.6	26.4
65.0			76.0	78.0	78.0	74.0	75.0	64.0	59.0	50.0	38.8	31.6	26.4
70.0			69.0	71.0	70.0	69.0	68.0	59.0	55.0	50.0	38.8	31.6	26.4
75.0				65.0	64.0	65.0	62.0	55.0	52.0	48.0	38.8	31.6	26.4
80.0				59.0	58.0	60.0	56.0	51.0	48.0	45.0	38.8	31.6	26.4
85.0				54.0	52.0	55.0	52.0	47.0	44.0	42.4	38.8	31.6	26.4
90.0				49.0	49.0	50.0	47.0	43.2	40.6	39.4	37.2	31.6	26.4
95.0					47.0	46.0	43.4	40.4	37.8	36.6	35.4	31.6	26.4
100.0					43.6	42.0	39.6	38.8	35.0	34.2	33.4	31.4	26.4
105.0						38.4	36.0	37.4	32.2	31.6	31.6	30.0	26.4
110.0						35.4	33.6	35.2	29.4	29.0	29.4	28.8	26.4
115.0						32.6	32.6	32.4	27.0	26.6	27.0	27.4	26.4
120.0						30.0	31.4	29.8	24.8	24.4	25.0	25.6	25.2
125.0							30.0	27.4	22.6	22.6	23.8	23.6	24.2
130.0							27.8	25.4	20.4	21.4	22.2	21.8	22.6
135.0							25.8	23.4	18.4	20.0	20.8	20.2	20.8
140.0								21.6	17.4	19.0	19.6	18.6	19.6
145.0								20.0	16.8	18.2	18.8	17.4	18.2
150.0								18.4	16.0	17.6	18.0	16.6	16.8
155.0								17.0	15.4	17.0	17.2	15.8	15.6
160.0									15.0	16.4	16.6	15.0	14.4
165.0									14.4	15.8	16.0	14.4	13.2
170.0									14.0	14.8	14.8	13.8	12.2
175.0									13.4	13.8	13.6	12.8	11.0
180.0										12.8	12.6	11.8	10.0
185.0										12.4	11.6	10.8	9.0
190.0										11.8	10.8	9.8	8.0
195.0											9.8	9.0	7.2
200.0											9.0	8.0	6.2
205.0											8.6	7.2	5.4
210.0												6.6	4.6
215.0												5.8	4.0
220.0												5.0	3.2
225.0												4.4	

Loads greater than 376,000 lb can only be lifted with special equipment.

*THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.
The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane*

STERLING CRANE

Load charts

Main boom

													
15,6 m - 80 m (51.1 ft - 262.5 ft)	54 500 kg (120,200 lb)	27 ft 9 in spread (100%)	360°										
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
10.0	418.0	352.0											
15.0	344.0	324.0	304.0										
20.0	278.0	276.0	260.0										
25.0	219.0	220.0	220.0	217.0	178.0	139.0							
30.0	177.0	180.0	177.0	175.0	164.0	139.0	110.0	84.0					
35.0	145.0	149.0	150.0	145.0	140.0	131.0	110.0	84.0	64.0				
40.0		126.0	126.0	121.0	119.0	111.0	110.0	84.0	64.0	50.0	38.8		
45.0		108.0	109.0	108.0	102.0	96.0	95.0	84.0	64.0	50.0	38.8	31.6	
50.0		95.0	94.0	94.0	88.0	89.0	83.0	77.0	64.0	50.0	38.8	31.6	26.4
55.0			81.0	82.0	77.0	78.0	73.0	68.0	64.0	50.0	38.8	31.6	26.4
60.0			73.0	73.0	71.0	69.0	65.0	60.0	57.0	50.0	38.8	31.6	26.4
65.0			64.0	64.0	66.0	62.0	58.0	53.0	51.0	50.0	38.8	31.6	26.4
70.0			57.0	57.0	60.0	56.0	52.0	51.0	46.0	44.0	38.8	31.6	26.4
75.0				51.0	54.0	51.0	46.0	48.0	40.8	39.8	38.4	31.6	26.4
80.0				48.0	48.0	46.0	42.6	43.2	36.6	35.8	36.0	31.6	26.4
85.0				43.8	43.4	41.6	40.8	39.4	32.8	32.8	33.4	31.6	26.4
90.0				39.8	39.2	37.4	39.0	36.0	29.6	31.0	32.0	31.6	26.4
95.0					35.4	34.4	36.2	32.8	27.8	29.6	30.6	30.6	26.4
100.0					32.2	33.2	33.0	30.0	26.4	28.2	29.2	28.0	25.4
105.0						31.8	30.0	27.4	25.0	27.0	27.4	25.8	23.2
110.0						29.2	27.4	24.8	24.0	25.8	25.2	23.6	21.2
115.0						26.8	25.0	22.4	22.8	24.2	23.8	21.6	19.2
120.0						24.6	22.8	20.2	21.4	23.0	22.0	20.0	17.6
125.0							20.8	18.2	19.6	22.0	19.8	18.2	16.0
130.0							19.0	16.4	18.8	20.4	18.8	16.8	14.4
135.0							17.4	14.8	18.2	18.8	17.2	15.4	13.0
140.0								13.2	17.4	17.2	15.6	14.0	11.8
145.0								11.8	16.0	15.8	14.2	12.8	10.6
150.0								10.6	14.8	14.4	13.0	11.4	9.4
155.0								9.4	14.0	13.2	11.6	10.2	8.4
160.0									12.8	12.0	10.6	9.0	7.2
165.0									11.8	11.0	9.4	8.0	6.2
170.0									10.8	10.0	8.4	7.0	5.2
175.0									9.8	9.0	7.6	6.0	4.2
180.0										8.0	6.6	5.2	3.4
185.0										7.2	5.8	4.4	
190.0										6.4	5.0	3.6	
195.0											4.2	2.8	
200.0												3.6	
205.0												3.0	

													
15,6 m - 80 m (51.1 ft - 262.5 ft)	45 000 kg (99,200 lb)	27 ft 9 in spread (100%)	360°										
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
10.0	418.0	352.0											
15.0	340.0	324.0	304.0										
20.0	268.0	266.0	260.0	230.0	182.0								
25.0	209.0	210.0	210.0	193.0	178.0	139.0							
30.0	166.0	170.0	169.0	157.0	152.0	139.0	110.0	84.0					
35.0	137.0	140.0	136.0	132.0	125.0	116.0	110.0	84.0	64.0				
40.0		119.0	113.0	111.0	105.0	102.0	97.0	84.0	64.0	50.0	38.8		
45.0		99.0	96.0	95.0	90.0	89.0	83.0	77.0	64.0	50.0	38.8	31.6	
50.0		83.0	86.0	82.0	83.0	78.0	72.0	67.0	64.0	50.0	38.8	31.6	26.4
55.0			73.0	72.0	73.0	68.0	63.0	59.0	56.0	50.0	38.8	31.6	26.4
60.0			63.0	63.0	64.0	60.0	56.0	56.0	49.0	48.0	38.8	31.6	26.4
65.0			56.0	58.0	58.0	54.0	50.0	50.0	43.2	42.0	38.8	31.6	26.4
70.0			51.0	52.0	51.0	48.0	48.0	45.0	38.2	38.4	38.0	31.6	26.4
75.0				46.0	46.0	43.4	45.0	40.6	34.6	36.4	36.6	31.6	26.4
80.0				41.2	40.6	39.2	40.6	36.8	32.6	34.4	34.8	31.6	26.4
85.0				36.8	36.2	37.6	37.0	33.2	30.8	32.8	33.0	30.6	26.4
90.0				33.0	32.6	35.2	33.4	30.0	29.2	30.6	30.2	27.8	25.2
95.0					31.2	31.8	30.0	27.2	27.8	29.2	27.6	25.4	22.8
100.0					29.8	28.8	27.0	24.4	26.4	27.4	25.2	23.0	20.6
105.0						26.2	24.4	21.8	25.0	25.2	23.0	21.0	18.4
110.0						23.8	22.0	19.4	23.8	23.2	21.2	19.0	16.6
115.0						21.8	20.0	17.2	21.6	21.4	19.4	17.4	15.0
120.0						19.8	18.0	15.4	19.8	19.4	17.6	15.8	13.4
125.0							16.2	13.6	18.4	17.6	16.2	14.2	11.8
130.0							15.2	12.0	16.8	16.0	14.6	12.8	10.6
135.0							14.4	10.6	15.2	14.4	13.0	11.4	9.2
140.0								9.2	13.8	13.2	11.6	10.2	8.0
145.0								8.0	12.6	11.8	10.4	8.8	7.0
150.0								6.8	11.4	10.6	9.2	7.6	5.8
155.0								5.8	10.4	9.6	8.0	6.6	4.8
160.0									9.4	8.4	7.0	5.6	3.6
165.0									8.4	7.6	6.0	4.6	2.8
170.0									7.4	6.6	5.2	3.6	
175.0									6.6	5.8	4.4	2.8	
180.0										5.0	3.6		
185.0										4.2	2.8		
190.0										3.6			

Loads greater than 376,000 lb can only be lifted with special equipment.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane

Load charts

Main boom

													
15,6 m - 80 m (51.1 ft - 262.5 ft)	35 500 kg (78,200 lb)	27 ft 9 in spread (100%)	360°										
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
10.0	418.0	352.0											
15.0	336.0	324.0	304.0										
20.0	256.0	258.0	256.0	230.0	182.0								
25.0	197.0	199.0	190.0	177.0	169.0	139.0							
30.0	156.0	157.0	148.0	143.0	133.0	122.0	110.0	84.0					
35.0	123.0	128.0	119.0	116.0	109.0	107.0	99.0	84.0	64.0				
40.0		104.0	102.0	97.0	96.0	90.0	83.0	77.0	64.0	50.0	38.8		
45.0		84.0	86.0	82.0	83.0	77.0	71.0	67.0	62.0	50.0	38.8	31.6	
50.0		69.0	72.0	73.0	71.0	67.0	61.0	62.0	54.0	50.0	38.8	31.6	26.4
55.0			64.0	66.0	63.0	58.0	56.0	54.0	47.0	46.0	38.8	31.6	26.4
60.0			55.0	57.0	55.0	51.0	53.0	48.0	41.4	42.8	38.8	31.6	26.4
65.0			48.0	49.0	49.0	47.0	47.0	42.4	38.8	40.4	38.0	31.6	26.4
70.0			42.0	43.2	42.6	44.0	41.8	37.8	36.6	37.6	36.6	31.6	26.4
75.0				38.0	37.4	40.4	37.6	33.6	34.6	35.6	33.4	30.8	26.4
80.0				33.6	35.6	35.8	34.0	30.0	32.6	32.4	30.0	27.4	24.6
85.0				30.0	32.8	32.0	30.2	26.8	30.6	29.4	27.0	24.6	21.8
90.0				28.8	29.4	28.6	26.8	24.0	28.2	26.6	24.4	22.0	19.4
95.0					26.4	26.2	23.8	21.2	25.6	24.2	22.0	19.8	17.2
100.0					23.8	25.0	21.2	18.6	23.4	22.0	19.8	17.6	15.2
105.0						22.8	19.4	16.2	21.2	20.0	17.8	15.8	13.4
110.0						20.6	18.6	14.2	19.0	18.2	16.2	14.0	11.6
115.0						18.8	17.6	12.2	17.2	16.4	14.4	12.4	10.2
120.0						17.0	16.6	10.6	15.4	14.6	13.0	11.0	8.8
125.0							15.2	9.0	13.8	13.0	11.6	9.8	7.4
130.0							13.8	7.6	12.4	11.6	10.2	8.4	6.2
135.0							12.4	6.4	11.0	10.2	8.8	7.2	5.2
140.0								5.2	9.8	9.0	7.6	6.0	4.0
145.0								4.0	8.8	8.0	6.4	5.0	3.0
150.0								3.0	7.6	6.8	5.4	4.0	
155.0									6.6	5.8	4.4	3.0	
160.0									5.8	5.0	3.6		
165.0									5.0	4.2	2.6		
170.0									4.2	3.4			
175.0									3.4				

													
15,6 m - 80 m (51.1 ft - 262.5 ft)	26 000 kg (57,300 lb)	27 ft 9 in spread (100%)	360°										
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
10.0	418.0	352.0											
15.0	330.0	324.0	304.0										
20.0	244.0	246.0	222.0	197.0	182.0								
25.0	185.0	179.0	166.0	159.0	146.0	133.0							
30.0	137.0	137.0	130.0	123.0	114.0	112.0	103.0	84.0					
35.0	101.0	109.0	105.0	99.0	99.0	92.0	84.0	77.0	64.0				
40.0		86.0	87.0	87.0	82.0	77.0	70.0	70.0	61.0	50.0	38.8		
45.0		69.0	73.0	74.0	70.0	65.0	64.0	60.0	51.0	49.0	38.8	31.6	
50.0		58.0	63.0	64.0	60.0	56.0	57.0	52.0	48.0	47.0	38.8	31.6	26.4
55.0			53.0	54.0	52.0	52.0	49.0	45.0	45.0	43.6	38.0	31.6	26.4
60.0			45.0	46.0	46.0	47.0	43.2	38.6	41.4	40.6	36.8	31.6	26.4
65.0			38.4	39.8	41.8	41.4	38.0	33.8	37.8	35.8	33.0	30.2	26.4
70.0			33.0	35.0	37.6	36.8	33.6	29.4	33.8	31.8	29.2	26.6	23.6
75.0				32.4	33.0	32.8	29.8	25.8	30.2	28.4	26.0	23.4	20.6
80.0				28.6	29.2	30.6	27.8	22.6	27.0	25.4	23.0	20.6	18.0
85.0				25.2	25.8	27.2	26.2	19.8	24.2	22.8	20.4	18.2	15.6
90.0				22.4	22.8	24.2	24.0	17.4	21.8	20.4	18.2	16.0	13.4
95.0					20.2	21.6	21.4	15.0	19.6	18.2	16.0	14.0	11.4
100.0					18.0	19.2	19.2	12.8	17.6	16.2	14.2	12.2	9.6
105.0						17.2	17.0	10.6	15.6	14.6	12.6	10.4	8.0
110.0						15.4	15.2	9.0	13.8	13.0	11.0	9.0	6.6
115.0						13.8	13.6	7.2	12.2	11.4	9.6	7.6	5.4
120.0						12.2	12.0	5.8	10.6	9.8	8.2	6.4	4.0
125.0							10.6	4.4	9.2	8.4	7.0	5.2	3.0
130.0							9.4	3.2	8.0	7.2	5.8	4.2	
135.0							8.2		6.8	6.0	4.6	3.0	
140.0									5.8	5.0	3.6		
145.0									4.8	4.0			
150.0									4.0	3.2			
155.0									3.0				

Loads greater than 376,000 lb can only be lifted with special equipment.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane

STERLING CRANE

Load charts

Main boom

   													
15,6 m - 80 m (51.1 ft - 262.5 ft) 16 500 kg (36,400 lb) 27 ft 9 in spread (100%) 360°													
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6	209.5	227.4	245.3	262.5
10.0	418.0	352.0											
15.0	320.0	320.0	292.0										
20.0	228.0	209.0	190.0	182.0	164.0								
25.0	159.0	153.0	144.0	134.0	122.0	119.0							
30.0	109.0	114.0	110.0	105.0	101.0	94.0	85.0	79.0					
35.0	79.0	88.0	87.0	88.0	82.0	76.0	74.0	68.0	58.0				
40.0		68.0	75.0	72.0	68.0	64.0	63.0	56.0	53.0	47.0	38.8		
45.0		55.0	60.0	60.0	56.0	57.0	53.0	47.0	50.0	46.0	38.0	31.6	
50.0		45.0	49.0	51.0	52.0	49.0	45.0	39.8	43.8	41.4	37.4	31.6	26.4
55.0			40.8	42.2	45.0	43.0	39.6	33.8	38.0	35.8	32.8	29.8	26.4
60.0			34.2	38.4	39.0	38.8	36.6	28.8	33.2	31.2	28.4	25.6	22.4
65.0			29.2	32.8	33.4	34.2	32.8	24.6	29.0	27.2	24.6	22.0	19.0
70.0			24.8	28.2	29.4	30.2	29.0	21.0	25.6	23.8	21.4	18.8	16.0
75.0				24.4	25.4	26.2	25.6	18.0	22.4	20.8	18.6	16.0	13.2
80.0				21.0	22.2	23.0	22.8	15.2	19.8	18.2	16.0	13.6	11.0
85.0				18.2	19.2	20.0	20.0	12.8	17.4	16.0	13.6	11.4	8.8
90.0				15.8	16.8	17.6	17.4	10.6	15.2	13.8	11.6	9.4	7.0
95.0					14.6	15.4	15.2	8.6	13.4	12.0	9.8	7.8	5.2
100.0					12.6	13.4	13.2	6.8	11.6	10.4	8.2	6.2	3.8
105.0						11.6	11.6	5.2	10.0	8.8	6.8	4.8	
110.0						10.2	10.0	3.6	8.6	7.4	5.4	3.6	
115.0						8.8	8.6		7.2	6.2	4.2		
120.0						7.4	7.2		5.8	5.0	3.2		
125.0							6.0		4.6	4.0			
130.0							5.0		3.6	2.8			
135.0							4.0		2.6				

   													
15,6 m - 80 m (51.1 ft - 262.5 ft) 7000 kg (15,400 lb) 27 ft 9 in spread (100%) 360°													
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.5	191.6				
10.0	414.0	352.0											
15.0	304.0	288.0	248.0										
20.0	191.0	178.0	165.0	150.0	134.0								
25.0	125.0	124.0	118.0	115.0	106.0	96.0							
30.0	82.0	91.0	92.0	87.0	81.0	77.0	73.0	60.0					
35.0	58.0	68.0	71.0	69.0	66.0	64.0	58.0	58.0	49.0				
40.0		52.0	57.0	55.0	56.0	55.0	47.0	49.0	46.0				
45.0		40.0	45.0	48.0	47.0	46.0	39.0	41.4	38.2				
50.0		31.2	36.2	40.2	39.6	38.8	32.2	34.8	32.0				
55.0			29.6	33.2	33.4	32.8	26.6	29.4	27.0				
60.0			24.2	27.6	28.4	28.0	22.2	25.0	22.8				
65.0			19.6	23.2	24.2	24.0	18.4	21.4	19.2				
70.0			16.0	19.4	20.6	20.6	15.4	18.2	16.4				
75.0				16.2	17.4	17.6	12.6	15.6	13.8				
80.0				13.4	14.6	15.2	10.2	13.4	11.6				
85.0				11.2	12.2	13.0	8.2	11.2	9.6				
90.0				9.2	10.2	11.0	6.4	9.6	7.8				
95.0					8.4	9.2	4.8	8.0	6.4				
100.0					6.8	7.6	3.4	6.6	5.0				
105.0						6.2		5.2	3.8				
110.0						4.8		4.0	2.6				
115.0						3.8		3.0					
120.0						2.8							

   													
15,6 m - 80 m (51.1 ft - 262.5 ft) 0 kg (0 lb) 27 ft 9 in spread (100%) 360°													
	 Pounds x 1000												
Feet	51.1	68.7	86.1	103.4	120.8	138.1	155.9	173.3	191.6				
10.0	410.0	352.0											
15.0	290.0	252.0	211.0										
20.0	160.0	151.0	140.0	128.0	121.0								
25.0	98.0	103.0	102.0	96.0	87.0	84.0							
30.0	62.0	74.0	74.0	70.0	70.0	67.0	58.0	59.0					
35.0	42.4	53.0	57.0	58.0	56.0	53.0	45.0	47.0	42.8				
40.0		39.0	43.4	46.0	44.0	42.6	35.0	37.4	34.2				
45.0		29.2	34.6	36.4	35.6	34.6	27.8	30.6	27.6				
50.0		21.8	27.2	29.4	29.0	28.4	22.2	25.0	22.6				
55.0			21.4	24.0	23.8	23.6	17.6	20.6	18.4				
60.0			16.8	19.6	19.8	19.6	14.0	17.0	15.0				
65.0			13.0	16.2	16.2	16.2	11.0	14.0	12.0				
70.0			9.8	13.2	13.4	13.4	8.4	11.4	9.6				
75.0				10.4	11.0	11.0	6.2	9.2	7.6				
80.0				8.2	8.8	9.0	4.2	7.4	5.8				
85.0				6.2	7.0	7.2		5.8	4.2				
90.0				4.6	5.4	5.8		4.2	2.8				
95.0					4.0	4.4		3.0					
100.0					2.6	3.2							

Loads greater than 376,000 lb can only be lifted with special equipment.


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane

Working range

Hydraulic offsettable swingaway

263 ft main boom with 39 ft - 69 ft swingaway

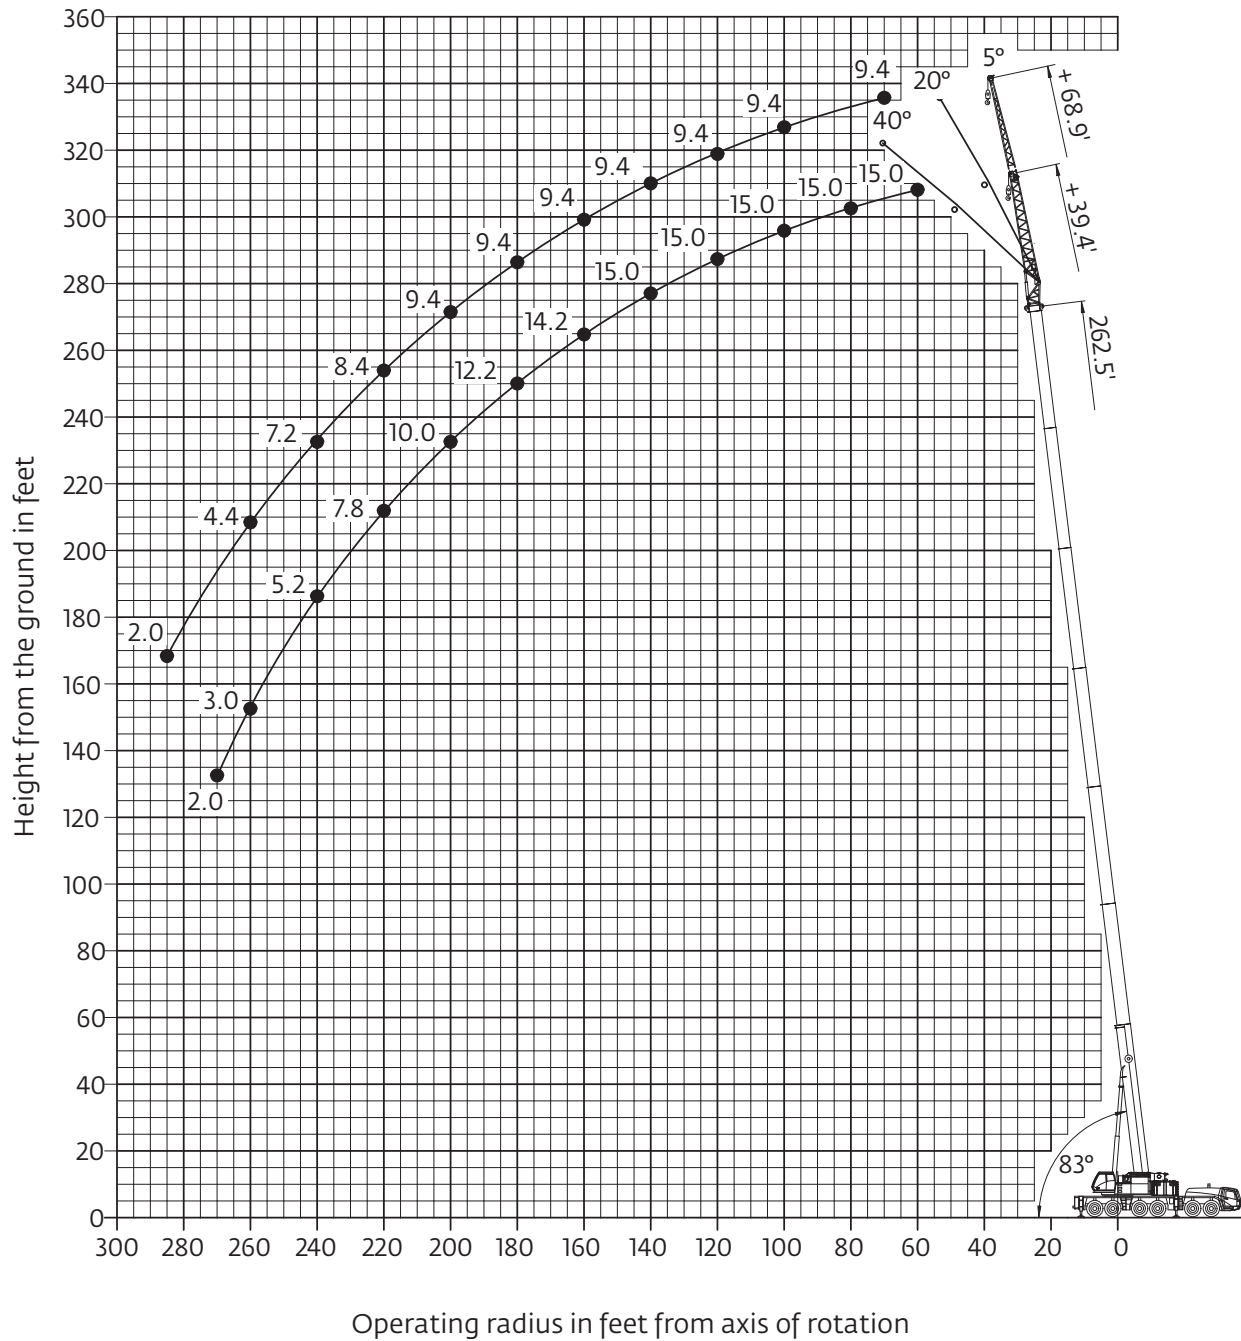

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Hydraulic offsettable swingaway

Intermediate angle and loads for luffing



74,8 m - 80 m
(245 ft - 263 ft)



12 m - 21 m
(39 ft - 69 ft)



92 500 kg
(203,900 lb)



27 ft 9 in spread
(100%)



360°



Pounds x 1000

Feet	5°	245.3' + 39.4'	20°- 40°	5°	262.5' + 39.4'	20°- 40°	5°	245.3' + 68.9'	20°- 40°	5°	262.5' + 68.9'	20°- 40°
	5°- 20°			5°- 20°			5°- 20°			5°- 20°		
55.0	18.6											
60.0	18.6	18.0		15.0	14.8							
65.0	18.6	18.0		15.0	14.8							
70.0	18.6	18.0		15.0	14.8			11.0			9.4	
75.0	18.6	18.0	18.0	15.0	14.8			11.0			9.4	
80.0	18.6	18.0	17.8	15.0	14.8	14.8		11.0	11.0		9.4	9.4
85.0	18.6	18.0	17.6	15.0	14.8	14.8		11.0	11.0		9.4	9.4
90.0	18.6	18.0	17.6	15.0	14.8	14.8		11.0	11.0		9.4	9.4
95.0	18.6	18.0	17.4	15.0	14.8	14.8		11.0	11.0		9.4	9.4
100.0	18.6	18.0	17.2	15.0	14.8	14.8		11.0	11.0	9.6	9.4	9.4
105.0	18.6	18.0	17.2	15.0	14.8	14.8		11.0	11.0	9.4	9.4	9.4
110.0	18.6	18.0	17.0	15.0	14.8	14.8		11.0	11.0	9.4	9.4	9.2
115.0	18.6	18.0	17.0	15.0	14.8	14.8		11.0	10.8	9.2	9.4	9.2
120.0	18.6	18.0	16.8	15.0	14.8	14.8		11.0	10.6	9.2	9.4	9.2
125.0	18.6	18.0	16.8	15.0	14.8	14.8		11.0	10.6	9.2	9.4	9.0
130.0	18.6	18.0	16.6	15.0	14.8	14.8		11.0	10.4	9.0	9.4	9.0
135.0	18.4	18.0	16.6	15.0	14.8	14.8		11.0	10.2	9.0	9.4	9.0
140.0	17.8	17.6	16.4	15.0	14.8	14.8		11.0	10.2	9.0	9.4	8.8
145.0	17.0	17.0	16.4	15.0	14.8	14.8		11.0	10.0	8.8	9.4	8.8
150.0	16.2	16.2	16.2	15.0	14.8	14.6		11.0	9.8	8.8	9.4	8.8
155.0	15.4	15.4	15.6	14.6	14.6	14.4		11.0	9.8	8.8	9.4	8.8
160.0	14.6	14.6	15.0	14.2	14.2	14.2		11.0	9.6	8.8	9.4	8.6
165.0	14.0	14.0	14.4	13.8	13.6	13.6		10.8	9.6	8.6	9.4	8.6
170.0	13.4	13.4	13.6	13.2	13.2	13.2		10.6	9.4	8.6	9.4	8.6
175.0	12.6	12.6	13.0	12.4	12.4	12.8		10.4	9.4	8.6	9.4	8.6
180.0	11.8	11.8	12.4	12.0	12.0	12.2		10.4	9.2	8.6	9.4	8.6
185.0	11.0	11.0	11.6	11.4	11.4	11.8		10.2	9.2	8.6	9.4	8.4
190.0	10.4	10.4	11.0	10.8	10.8	11.2		10.0	9.0	8.6	9.4	8.4
195.0	9.6	9.6	10.2	10.2	10.2	10.6		10.0	9.0	8.4	9.4	8.4
200.0	9.0	9.0	9.6	9.6	9.6	10.0		9.6	9.0	8.4	9.4	8.4
205.0	8.6	8.6	8.8	9.0	9.0	9.6		9.4	8.8	8.4	9.2	8.4
210.0	8.2	8.2	8.4	8.4	8.4	9.0		9.0	8.8	8.4	8.8	8.4
215.0	7.8	7.8	8.0	8.0	8.0	8.4		8.4	8.4	8.4	8.6	8.4
220.0	7.4	7.4		7.4	7.4	7.8		7.8	7.8	8.4	8.2	8.4
225.0	7.0	7.0		6.8	6.8	7.2		7.4	7.4	8.2	7.8	8.0
230.0	6.6	6.6		6.4	6.4			6.8	6.8	7.6	7.4	7.8
235.0	6.2	6.2		5.8	5.8			6.4	6.4	7.0	6.8	7.6
240.0	5.8	5.8		5.2	5.2			6.0	6.0	6.6	6.4	7.2
245.0	5.6	5.6		4.6	4.6			5.8	5.8		6.0	6.6
250.0	5.2	5.2		4.0	4.0			5.4	5.4		5.6	6.2
255.0	4.8	4.8		3.4	3.4			5.2	5.2		5.0	5.6
260.0	4.4			3.0	3.0			4.8	4.8		4.4	
265.0				2.4	2.4			4.6	4.6		4.0	
270.0				2.0	2.0			4.2	4.2		3.4	
275.0								4.0	4.0		3.0	
280.0								3.8	3.8		2.4	
285.0								3.4	3.4		2.0	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

Hydraulic offsettable swingaway

Intermediate angle and loads for luffing



74,8 m - 80 m
(245 ft - 263 ft)



12 m - 21 m
(39 ft - 69 ft)



54 500 kg
(120,100 lb)



27 ft 9 in spread
(100%)



360°



Pounds x 1000

Feet	5°	245.3' + 39.4' 5°- 20°	20°- 40°	5°	262.5' + 39.4' 5°- 20°	20°- 40°	5°	245.3' + 68.9' 5°- 20°	20°- 40°	5°	262.5' + 68.9' 5°- 20°	20°- 40°
55.0	18.6											
60.0	18.6	18.0		15.0	14.8							
65.0	18.6	18.0		15.0	14.8							
70.0	18.6	18.0		15.0	14.8		11.0			9.4		
75.0	18.6	18.0	18.0	15.0	14.8		11.0			9.4		
80.0	18.6	18.0	17.8	15.0	14.8	14.8	11.0	11.0		9.4	9.4	
85.0	18.6	18.0	17.6	15.0	14.8	14.8	11.0	11.0		9.4	9.4	
90.0	18.6	18.0	17.6	15.0	14.8	14.8	11.0	11.0		9.4	9.4	
95.0	18.6	18.0	17.4	15.0	14.8	14.8	11.0	11.0		9.4	9.4	
100.0	18.6	18.0	17.2	15.0	14.8	14.8	11.0	11.0	9.6	9.4	9.4	
105.0	18.6	18.0	17.2	15.0	14.8	14.8	11.0	11.0	9.4	9.4	9.4	9.4
110.0	18.6	18.0	17.0	15.0	14.8	14.8	11.0	11.0	9.4	9.4	9.4	9.2
115.0	18.0	18.0	17.0	15.0	14.8	14.8	11.0	10.8	9.2	9.4	9.4	9.2
120.0	17.4	17.0	16.8	15.0	14.8	14.8	11.0	10.6	9.2	9.4	9.4	9.2
125.0	17.4	16.6	16.0	15.0	14.8	14.8	11.0	10.6	9.2	9.4	9.4	9.0
130.0	16.2	16.2	15.6	14.0	14.0	14.8	11.0	10.4	9.0	9.4	9.4	9.0
135.0	14.8	14.8	15.2	12.6	12.6	13.6	11.0	10.2	9.0	9.4	9.4	9.0
140.0	13.6	13.6	14.6	11.4	11.4	12.4	11.0	10.2	9.0	9.4	9.4	8.8
145.0	12.4	12.4	13.2	10.2	10.2	11.2	11.0	10.0	8.8	9.4	9.4	8.8
150.0	11.2	11.2	12.2	9.0	9.0	10.0	10.6	9.8	8.8	9.4	9.4	8.8
155.0	10.2	10.2	11.0	8.0	8.0	9.0	10.6	9.6	8.8	9.4	9.4	8.8
160.0	9.2	9.2	10.0	7.0	7.0	8.0	10.6	9.6	8.8	8.8	8.8	8.6
165.0	8.4	8.4	9.0	6.2	6.2	7.0	9.8	9.4	8.6	7.8	7.8	8.6
170.0	7.4	7.4	8.2	5.4	5.4	6.0	9.0	9.0	8.6	7.0	7.0	8.4
175.0	6.4	6.4	7.2	4.6	4.6	5.2	8.2	8.2	8.6	6.2	6.2	7.6
180.0	5.6	5.6	6.2	3.6	3.6	4.4	7.4	7.4	8.6	5.4	5.4	6.8
185.0	4.6	4.6	5.4	2.8	2.8	3.6	6.6	6.6	7.8	4.6	4.6	6.0
190.0	3.8	3.8	4.4	2.0	2.0	2.8	5.8	5.8	7.0	4.0	4.0	5.2
195.0	3.2	3.2	3.6			2.0	5.0	5.0	6.2	3.2	3.2	4.4
200.0	2.4	2.4	3.0				4.2	4.2	5.4	2.6	2.6	3.8
205.0			2.2				3.6	3.6	4.6			3.0
210.0							3.0	3.0	4.0			2.4
215.0							2.4	2.4	3.2			
220.0									2.6			
225.0									2.0			


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Hydraulic offsettable swingaway with inserts

263 ft main boom with 39 ft - 69 ft swingaway and 2 X 26 ft inserts

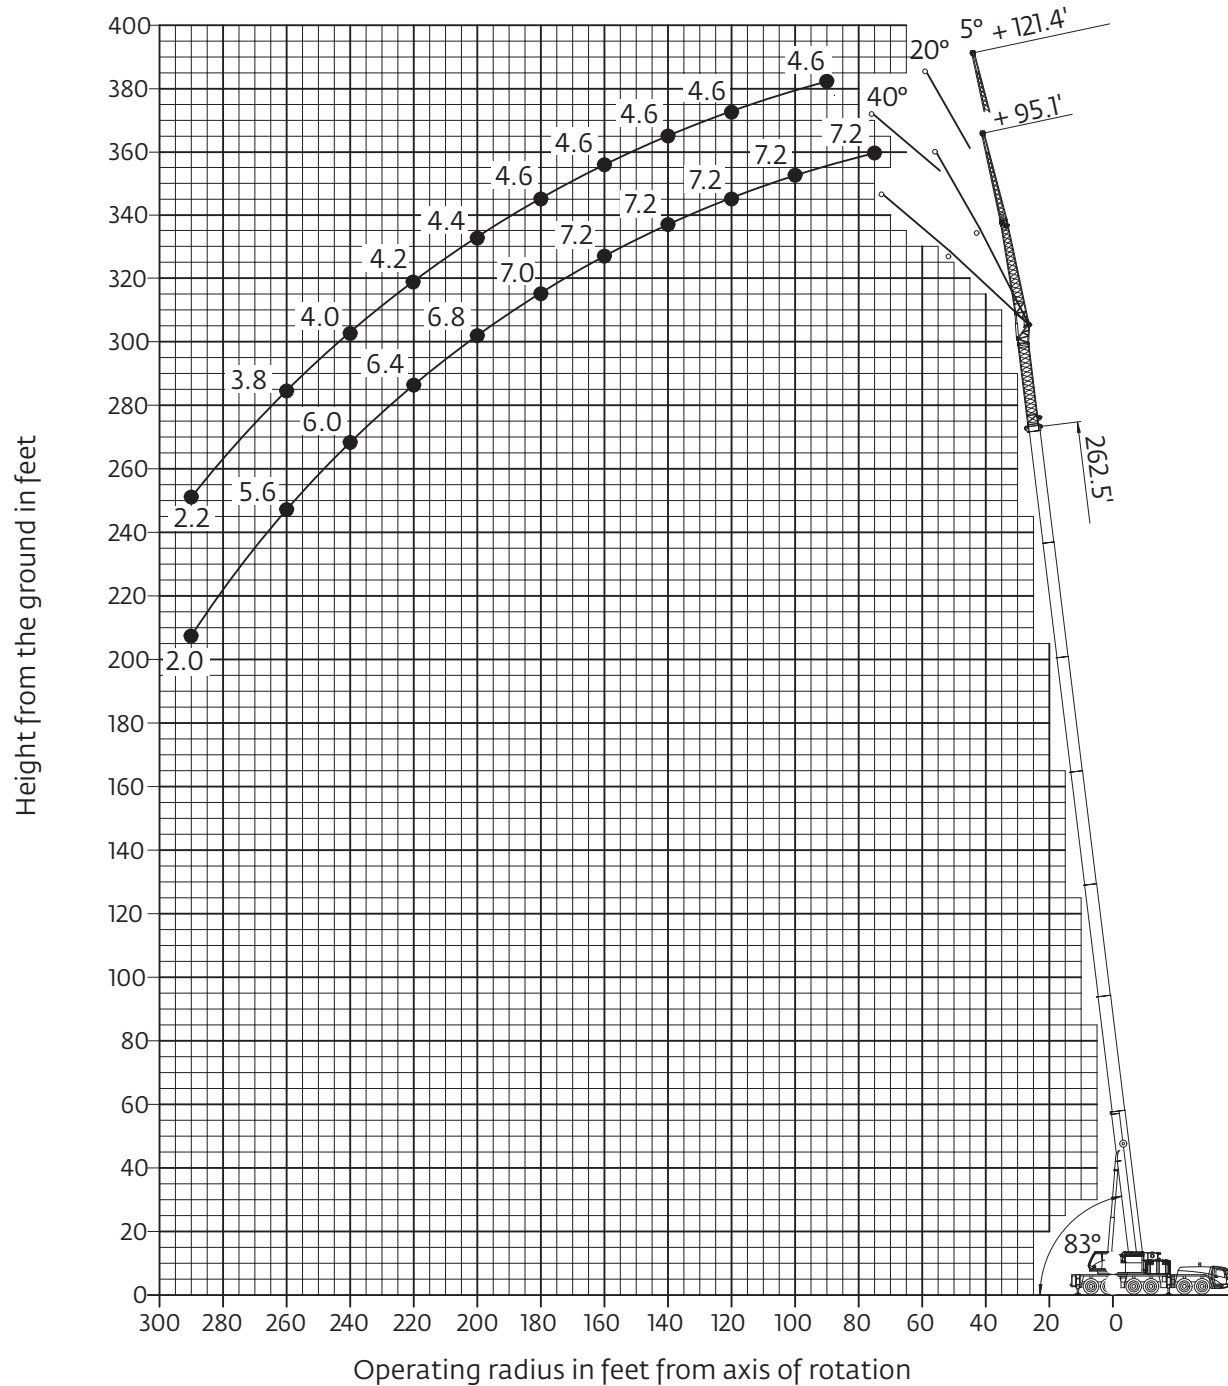

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Hydraulic offsettable swingaway with inserts



74.8 m - 80 m
(245 ft - 263 ft)



29 m - 37 m
(95 ft - 121 ft)



92 500 kg
(203,900 lb)



27 ft 9 in spread
(100%)



360°



Pounds x 1000

Feet	5°	245.3' + 95.1' 5°- 20°	20°- 40°	5°	262.5' + 95.1' 5°- 20°	20°- 40°	5°	245.3' + 121.4' 5°- 20°	20°- 40°	5°	262.5' + 121.4' 5°- 20°	20°- 40°
75.0	8.4			7.2								
80.0	8.4			7.2			5.6					
85.0	8.4			7.2			5.6					
90.0	8.4			7.2			5.6					
95.0	8.4	8.4		7.2	7.2		5.6				4.6	
100.0	8.4	8.4		7.2	7.2		5.6	5.6			4.6	4.6
105.0	8.4	8.4	7.0	7.2	7.2		5.6	5.6			4.6	4.6
110.0	8.4	8.2	7.0	7.2	7.2		5.6	5.6			4.6	4.6
115.0	8.4	8.2	7.0	7.2	7.2	6.2	5.6	5.6	4.4		4.6	4.6
120.0	8.4	8.0	7.0	7.2	7.2	6.2	5.6	5.6	4.4		4.6	4.6
125.0	8.4	8.0	7.0	7.2	7.2	6.2	5.6	5.6	4.4		4.6	4.6
130.0	8.4	7.8	7.0	7.2	7.2	6.2	5.6	5.4	4.4		4.6	4.6
135.0	8.2	7.8	7.0	7.2	7.2	6.2	5.6	5.4	4.4		4.6	4.6
140.0	8.2	7.6	7.0	7.2	7.2	6.2	5.6	5.4	4.4		4.6	4.6
145.0	8.0	7.6	7.0	7.2	7.2	6.2	5.4	5.2	4.4		4.6	4.6
150.0	8.0	7.6	7.0	7.2	7.0	6.2	5.4	5.2	4.4		4.6	4.6
155.0	7.8	7.4	7.0	7.2	7.0	6.2	5.4	5.0	4.4		4.6	4.6
160.0	7.8	7.4	7.0	7.2	7.0	6.2	5.2	5.0	4.4		4.6	4.6
165.0	7.6	7.2	7.0	7.2	6.8	6.2	5.2	5.0	4.4		4.6	4.6
170.0	7.6	7.2	6.8	7.2	6.8	6.2	5.0	4.8	4.4		4.6	4.6
175.0	7.6	7.2	6.8	7.0	6.8	6.2	5.0	4.8	4.4		4.6	4.4
180.0	7.4	7.0	6.8	7.0	6.6	6.2	5.0	4.8	4.4		4.6	4.4
185.0	7.4	7.0	6.6	7.0	6.6	6.2	4.8	4.6	4.4		4.6	4.4
190.0	7.2	6.8	6.6	6.8	6.6	6.2	4.8	4.6	4.4		4.4	4.4
195.0	7.2	6.8	6.6	6.8	6.6	6.2	4.8	4.6	4.4		4.4	4.2
200.0	7.0	6.6	6.4	6.8	6.4	6.2	4.6	4.4	4.4		4.4	4.2
205.0	7.0	6.6	6.4	6.6	6.4	6.2	4.6	4.4	4.4		4.4	4.2
210.0	6.8	6.4	6.4	6.6	6.4	6.2	4.6	4.4	4.4		4.2	4.2
215.0	6.8	6.4	6.4	6.6	6.4	6.2	4.4	4.4	4.4		4.2	4.0
220.0	6.6	6.2	6.2	6.4	6.2	6.2	4.4	4.2	4.4		4.2	4.0
225.0	6.6	6.2	6.2	6.4	6.2	6.2	4.4	4.2	4.4		4.2	4.0
230.0	6.4	6.2	6.2	6.4	6.0	6.2	4.2	4.2	4.4		4.0	4.0
235.0	6.4	6.0	6.2	6.2	6.0	6.0	4.2	4.0	4.2		4.0	4.0
240.0	6.0	6.0	6.0	6.0	6.0	6.0	4.2	4.0	4.2		4.0	3.8
245.0	5.6	5.8	6.0	6.0	5.8	6.0	4.0	4.0	4.2		4.0	3.8
250.0	5.2	5.4	6.0	5.8	5.8	6.0	4.0	4.0	4.0		3.8	3.8
255.0	4.8	5.2	5.6	5.4	5.4	5.8	4.0	4.0	4.0		3.8	3.8
260.0	4.6	5.0		4.8	4.8	5.6	4.0	3.8	4.0		3.8	3.8
265.0	4.4	4.6		4.4	4.4	5.0	3.8	3.8	4.0		3.8	3.6
270.0	4.0	4.4		3.8	3.8		3.6	3.6	3.8		3.6	3.8
275.0	3.8	4.0		3.2	3.2		3.4	3.6	3.8		3.6	3.6
280.0	3.6	3.8		2.8	2.8		3.2	3.6			3.0	3.0
285.0	3.2	3.6		2.4	2.4		3.0	3.4			2.6	2.6
290.0	3.0	3.2		2.0	2.0		2.8	3.0			2.2	2.2
295.0	2.8	3.0					2.6	2.8				
300.0	2.6	2.6					2.2	2.6				
305.0	2.2						2.0	2.4				
310.0	1.8											

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

Hydraulic offsettable swingaway with inserts



74,8 m - 80 m
(245 ft - 263 ft)



29 m - 37 m
(95 ft - 121 ft)



92 500 kg
(203,900 lb)



27 ft 9 in spread
(100%)



360°



Pounds x 1000

Feet	5°	245.3' + 95.1' 5°- 20°	20°- 40°	5°	262.5' + 95.1' 5°- 20°	20°- 40°	5°	245.3' + 121.4' 5°- 20°	20°- 40°	5°	262.5' + 121.4' 5°- 20°	20°- 40°
75.0	8.4			7.2								
80.0	8.4			7.2			5.6					
85.0	8.4			7.2			5.6					
90.0	8.4			7.2			5.6				4.6	
95.0	8.4	8.4		7.2	7.2		5.6				4.6	
100.0	8.4	8.4		7.2	7.2		5.6	5.6			4.6	4.6
105.0	8.4	8.4	7.0	7.2	7.2		5.6	5.6			4.6	4.6
110.0	8.4	8.2	7.0	7.2	7.2		5.6	5.6			4.6	4.6
115.0	8.4	8.2	7.0	7.2	7.2	6.2	5.6	5.6	4.4		4.6	4.6
120.0	8.4	8.0	7.0	7.2	7.2	6.2	5.6	5.6	4.4		4.6	4.6 3.8
125.0	8.4	8.0	7.0	7.2	7.2	6.2	5.6	5.6	4.4		4.6	4.6 3.8
130.0	8.4	7.8	7.0	7.2	7.2	6.2	5.6	5.4	4.4		4.6	4.6 3.8
135.0	8.2	7.8	7.0	7.2	7.2	6.2	5.6	5.4	4.4		4.6	4.6 3.8
140.0	8.2	7.6	7.0	7.2	7.2	6.2	5.6	5.4	4.4		4.6	4.6 3.8
145.0	8.0	7.6	7.0	7.2	7.2	6.2	5.4	5.2	4.4		4.6	4.6 3.8
150.0	8.0	7.6	7.0	7.2	7.0	6.2	5.4	5.2	4.4		4.6	4.6 3.8
155.0	7.8	7.4	7.0	7.2	7.0	6.2	5.4	5.0	4.4		4.6	4.6 3.8
160.0	7.8	7.4	7.0	7.2	7.0	6.2	5.2	5.0	4.4		4.6	4.6 3.8
165.0	7.4	7.2	7.0	7.2	6.8	6.2	5.2	5.0	4.4		4.6	4.6 3.8
170.0	7.4	7.0	6.8	7.0	6.8	6.2	5.0	4.8	4.4		4.6	4.6 3.8
175.0	7.4	7.0	6.8	6.2	6.2	6.2	5.0	4.8	4.4		4.6	4.4 3.8
180.0	7.2	6.8	6.6	5.4	5.4	6.2	5.0	4.8	4.4		4.6	4.4 3.8
185.0	6.6	6.6	6.6	4.8	4.8	6.0	4.8	4.6	4.4		4.6	4.4 3.8
190.0	6.0	6.0	6.6	4.0	4.0	5.2	4.6	4.4	4.4		4.0	4.0 3.8
195.0	5.2	5.2	6.4	3.4	3.4	4.6	4.6	4.4	4.4		3.4	3.4 3.8
200.0	4.6	4.6	5.8	2.8	2.8	4.0	4.6	4.4	3.6		2.8	2.8 3.8
205.0	4.0	4.0	5.0	2.2		3.2	4.0	4.0	3.0		2.2	2.2 3.4
210.0	3.4	3.4	4.4			2.6	3.4	3.4	2.4			2.6
215.0	2.6	2.6	3.8			2.0	2.8	2.8				2.2
220.0	2.0	2.0	3.0				2.4	2.4				
225.0			2.4									
230.0			1.8									


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Integrated heavy duty jib

Heavy duty jib 7.5 ft

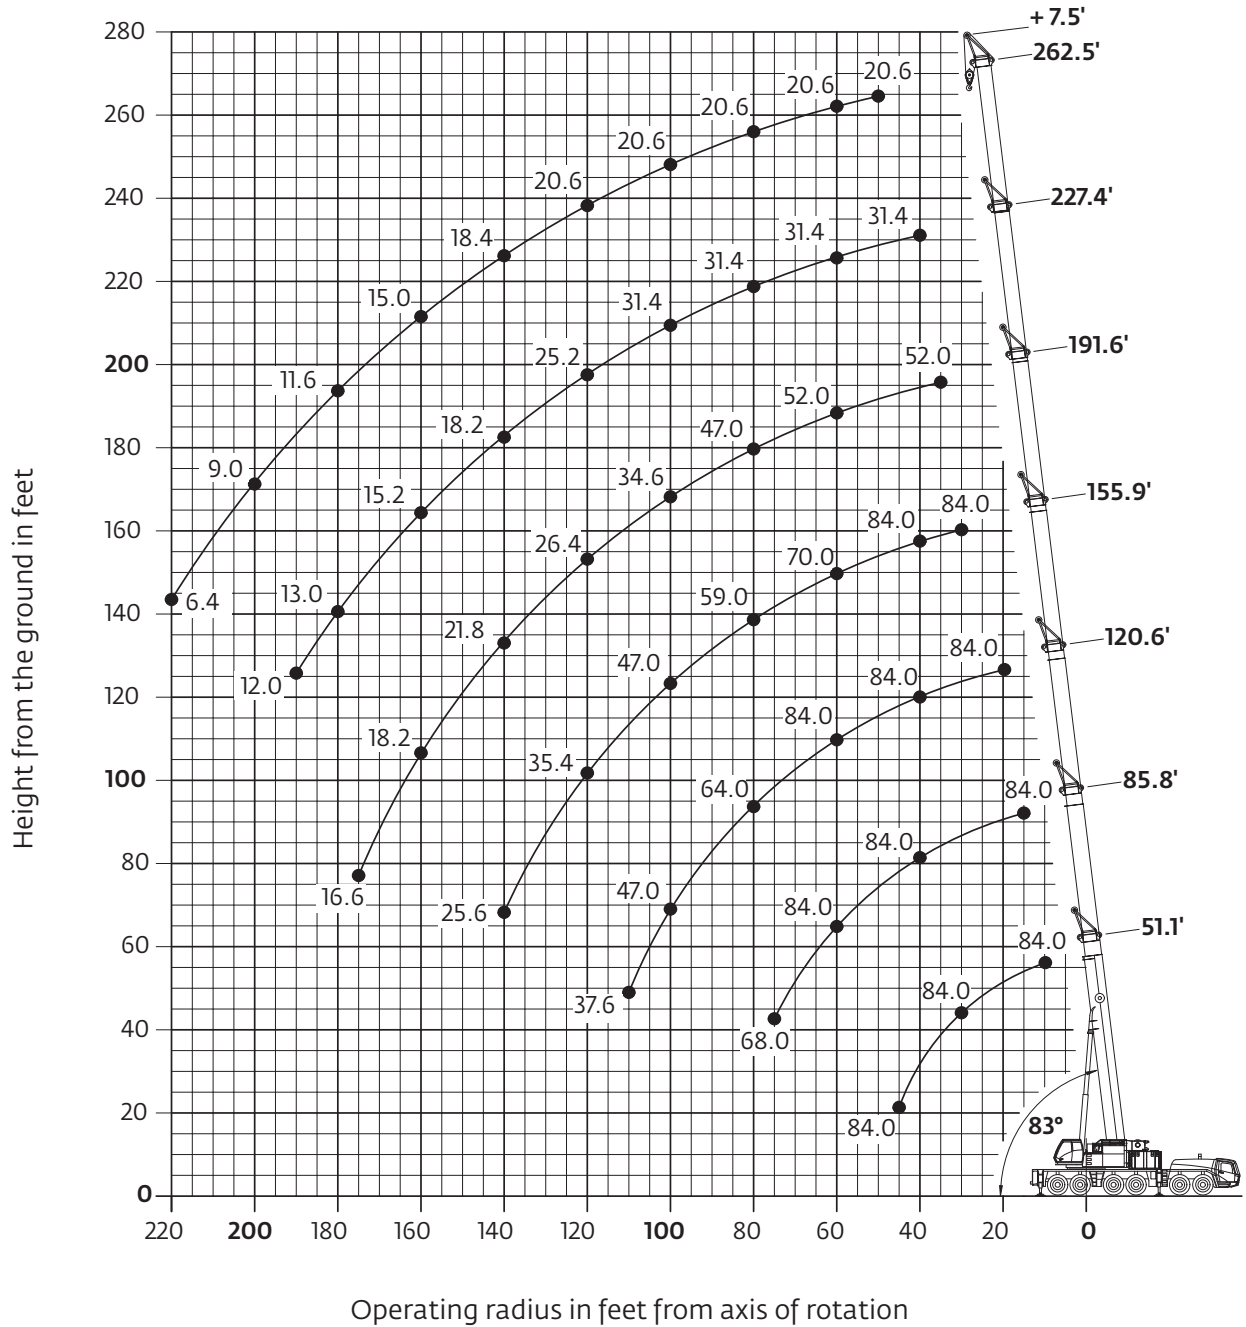

Working range

Integrated heavy duty jib

Fixed angle



15,6 m-80 m
(51 ft-263 ft)



2 m
(6.6 ft)



92 500 kg
(203,900 lb)



27 ft 9 in ft spread
(100%)



360°



Pounds (thousands)

Feet	51.1' + 6.6'		85.8' + 6.6'		120.6' + 6.6'		155.9' + 6.6'		191.6' + 6.6'		227.4' + 6.6'		262.5' + 6.6'	
	8°	30°	8°	30°	8°	30°	8°	30°	8°	30°	8°	30°	8°	30°
10.0		84.0												
15.0		84.0		84.0										
20.0		84.0		84.0		84.0								
25.0		84.0		84.0		84.0								
30.0		84.0		84.0		84.0		84.0						
35.0	84.0	84.0		84.0		84.0		84.0		52.0				
40.0	84.0	84.0		84.0		84.0		84.0		52.0		31.4		
45.0	84.0			84.0		84.0		80.0		52.0		31.4		
50.0				84.0		84.0		76.0		52.0		31.4		20.6
55.0				84.0		84.0		73.0		52.0		31.4		20.6
60.0			84.0	84.0		84.0		70.0		52.0		31.4		20.6
65.0			84.0	84.0		78.0		67.0		52.0		31.4		20.6
70.0			77.0	77.0		73.0		64.0		52.0		31.4		20.6
75.0			68.0			68.0		61.0		50.0		31.4		20.6
80.0					64.0	63.0		59.0		47.0		31.4		20.6
85.0					59.0	60.0		57.0		43.4		31.4		20.6
90.0					55.0	55.0		55.0		40.0		31.4		20.6
95.0					51.0	51.0		51.0		37.2		31.4		20.6
100.0					47.0			47.0		34.6		31.4		20.6
105.0					43.4		43.4	43.8		32.2		30.4		20.6
110.0					37.6		40.2	40.8		30.2		28.8		20.6
115.0							37.4	37.8		28.2		27.0		20.6
120.0							35.0	35.4		26.4		25.2		20.6
125.0							32.4	32.8		24.8		23.0		20.6
130.0							30.0	30.2		23.0		20.8		20.6
135.0							27.8		22.8	21.4		19.2		19.6
140.0							25.6		21.8	20.4		18.2		18.4
145.0									20.6	19.8		17.4		17.6
150.0									19.4	19.2		16.6		16.8
155.0									18.8	18.6		16.0		15.8
160.0									18.2			15.2		15.0
165.0									17.6			14.6		14.2
170.0									17.0			14.0		13.2
175.0									16.6			13.4		12.4
180.0												13.0		11.6
185.0												12.4		11.0
190.0												12.0		10.2
195.0														9.6
200.0														9.0
205.0														8.2
210.0														7.6
215.0														7.0
220.0														6.4

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

Integrated heavy duty jib

Fixed angle



15,6 m-80 m
(51 ft-263 ft)



2 m
(6.6 ft)



54 500 kg
(120,100 lb)



27 ft 9 in spread
(100%)



360°



Pounds (thousands)

Feet	51.1' + 6.6'		85.8' + 6.6'		120.6' + 6.6'		155.9' + 6.6'		191.6' + 6.6'		227.4' + 6.6'		262.5' + 6.6'	
	8°	30°	8°	30°	8°	30°	8°	30°	8°	30°	8°	30°	8°	30°
10.0		84.0												
15.0		84.0		84.0										
20.0		84.0		84.0		84.0								
25.0		84.0		84.0		84.0								
30.0		84.0		84.0		84.0		84.0						
35.0	84.0	84.0		84.0		84.0		84.0		52.0				
40.0	84.0	84.0		84.0		84.0		84.0		52.0		31.4		
45.0	84.0			84.0		84.0		80.0		52.0		31.4		
50.0				84.0		84.0		76.0		52.0		31.4		20.6
55.0				82.0		77.0		72.0		52.0		31.4		20.6
60.0			70.0	71.0		68.0		64.0		52.0		31.4		20.6
65.0			63.0	62.0		61.0		57.0		50.0		31.4		20.6
70.0			57.0	58.0		55.0		51.0		44.0		31.4		20.6
75.0			50.0			49.0		46.0		39.6		31.4		20.6
80.0					48.0	47.0		41.4		35.6		31.4		20.6
85.0					42.8	43.4		37.4		33.8		30.8		20.6
90.0					38.6	39.2		34.0		32.2		29.2		20.6
95.0					34.8	35.4		31.6		30.8		28.0		20.6
100.0					31.6			30.4		29.4		27.0		20.6
105.0					28.6		28.8	29.2		27.0		25.6		20.6
110.0					26.2		26.2	26.8		24.8		23.6		19.2
115.0							23.8	24.4		22.8		21.6		17.4
120.0							21.8	22.2		20.6		19.8		15.6
125.0							19.8	20.2		18.6		18.6		14.0
130.0							18.6	18.4		16.8		17.0		12.6
135.0							17.8		16.6	16.0		15.6		11.2
140.0							17.2		15.8	15.0		14.2		10.0
145.0									14.6	14.4		12.8		8.8
150.0									13.2	13.6		11.4		7.6
155.0									12.0	12.8		10.2		6.6
160.0									11.0			9.0		5.6
165.0									10.0			8.0		4.6
170.0									9.0			7.0		3.6
175.0									8.2			6.0		
180.0												5.2		
185.0												4.4		
190.0												3.6		
195.0														
200.0														
205.0														
210.0														
215.0														
220.0														

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Specifications

Superstructure



Boom

15,6 m - 80 m (51 ft - 263 ft) 7-section, full power MEGAFORM™ boom with TWIN-LOCK™ Pinning.
Maximum tip height: 83 m (272 ft).



Boom nose

Nine nylatron sheaves, mounted on heavy duty tapered roller bearings with removable pin-type rope guards. Quick Reeve boom nose. Removable auxiliary boom nose with removable pin type rope guard.



Boom elevation

Single lift cylinder with safety valve provides boom angle from -1.5° to +83°.



*Hydraulic offsettable lattice extension

12 m - 21 m (39 ft - 69 ft) bi-fold lattice swingaway extension, hydraulically offsettable and luffing under load, 5° - 40°.
Maximum tip height: 104 m (341 ft)



*Lattice inserts

2 x 8 m (26 ft) inserts for use with lattice swingaway extension to increase length to 37 m (121 ft).
Maximum tip height: 120 m (393 ft)



Load moment and anti-two block system

Load moment and anti-two block system with audio/visual warning and control lever lockout provides electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block condition.



Cab

All aluminum constructed cab with acoustical lining, hydraulic tilted to 20°. Includes tinted safety glass, adjustable operator's seat, opening windows at side and rear, hinged windshield with wiper, sun visor and window shade. Other features include hot water heater/defroster, armrest integrated crane controls, ergonomically arranged instrumentation and radio/CD player.



Swing

3 planetary gear boxes with fixed displacement axial piston motors. Infinitely variable to 1.3 rpm. Free swing or hydrostatically engaged brake controlled by swing lever. Swing brake selected by foot operated switch.



Counterweight

92,5 t (203,900 lb) consisting of various sections with hydraulic installation/removal system controlled from the superstructure cab.



Engine

Mercedes OM 926 LA six-cylinder
Horsepower: 210 kW (286 bhp) at 2200 rpm
Torque: 1120 Nm (826 ft/lb) at 1400 rpm
Engine emissions: EPA/CARB/EUROMOT (off road)



Fuel tank capacity

300 L (79 gal)



Electrical system

3 phase alternator: 28V/80A
2 batteries: 12V/170Ah



Hydraulic system

2 (two) separate circuits, 1 (one) axial piston variable displacement pump (load sensing) with electronic power limiting control for crane functions and 1 (one) double gear pump for slewing. Thermostatically controlled oil coolers keep oil at optimum operating temperature.

Hydraulic tank capacity: 1200 L (317 gal)

*Denotes optional equipment

Specifications

Superstructure continued



Hoist

Main and auxiliary hoist are powered by axial piston motor with planetary gear and brake. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

	Main	Auxiliary
Rope length:	350 m (1148 ft)	350 m (1148 ft)
Rope diameter:	22 mm	22 mm
Line speed:	127 m/min (417 fpm)	127 m/min (417 fpm)
Line pull:	93.5 kN (21,020 lb)	93.5 kN (21,020 lb)

Hoist camera and light included.

*Optional equipment

- Work lights, mounted on boom base section
- Boom mounted aircraft warning light
- Air conditioning
- Hook blocks/headache ball
- Engine independent diesel cab heater, with engine pre-heater. Includes 24 hour timer.
- Data logger
- 360° NYC swing lock
- 2 m (6.6 ft) side stowed heavy duty jib with 38 t (84,000 lb) maximum capacity using four parts of line, offset 8° and 30°
- Camera for boom head

Carrier



Chassis

Box type, torsion resistant frame is fabricated from high strength steel.



Outrigger system

Four hydraulic two stage outrigger beams with vertical cylinders and outrigger pads, 700 mm (27.6 in) round. Outrigger can be set in 5 positions:

Full:	8,5 m (27.9 ft)
Partial:	7,4 m (24.3 ft)
Partial:	6,3 m (20.7 ft)
Partial:	5,0 m (16.4 ft)
Retracted:	2,7 m (8.9 ft)

Independent horizontal and vertical movement controlled from each side of carrier and the superstructure cab. Electronic crane level indicators. Hydraulic disconnect for all outrigger beams. Work light for each outrigger beam and outrigger pad load indicator with read out on both sides of carrier and in superstructure cabin.



Transmission

Allison automatic 4500 SP, 6 speeds forward, 1 reverse
2 speed transfer case



Drive/steer

12x6x12



Axles

1st axle line – drive/steer
2nd axle line – steer
3rd axle line – steer (connects for all wheel steer)
4th axle line – drive/steer (connects for all wheel steer)
5th axle line – drive/steer (permanent drive with 12x6, disconnects for highway with 12x8)
6th axle line – steer (optional drive)
Drive axles with planetary hub reduction and center mounted gearing. Standard inter-axle and cross axle differential locks.

**Denotes optional equipment*

Specifications

Carrier continued



Suspension

Grove exclusive MEGATRAK™ suspension. Independent hydro-pneumatic system acting on all wheels with hydraulic lockout. Suspension can be raised 170 mm (6.7 in) or lowered 126 mm (5.0 in), both longitudinally and transversely. Features an automatic leveling system for highway travel.



Tires

12 tires, 16.00R25 (Vehicle width – 2,98 m [9.8 ft])



Steering

Dual circuit, hydraulic power assisted steering system. Transfer case mounted, ground driven emergency steering pump. Axles 1, 2, 5 and 6 steer on highway. Separate steering (steer by wire) of the 3rd to 6th axles for all wheel and crab steering, controlled by an electronic rocker switch.



Engine

Mercedes OM 502 LA, eight-cylinder
Horsepower: 405 kW (551 bhp) at 1800 rpm
Torque: 2600 Nm (1918 ft/lb) at 1300 rpm
Engine emissions: EPA /CARB/EUROMOT (off road)



Fuel tank capacity

500 L (132 gal). Installed on superstructure.



Brakes

Service brakes: pneumatic dual circuit acting on all wheels.
Parking brake: pneumatically operated spring loaded brake acting on axle lines 2, 4, 5 and 6.
Air dryer.



Cab

Two-man, composite designed aluminum and fiber reinforced plastic construction with the following features: safety glass, driver seat with pneumatic suspension, engine-dependent hot water heater, power windows, heated rear view mirrors, complete instrumentation, driving controls, reversing camera system, air conditioning, radio/CD player, 12V plug and fire extinguisher.



Electrical system

24V system with three phase alternator, 28V/100A
2 batteries, 12V/170 Ah



Maximum speed

85 km/h (53 mph)



Gradeability (theoretical)

49% - 14.00 tires
43% - 16.00/20.5 tires

Miscellaneous standard equipment

Work lights; tool kit, fire extinguishers; auxiliary boom nose, and wind speed indicator.

*Optional equipment

- ▣ 14.00R25 tires (vehicle width. 2,97 m [9.7 ft])
- ▣ 20.5R25 tires (vehicle width. 3,07 m [10.1 ft])
- ▣ 12x8x12 drive/steer
- ▣ Transmission retarder
- ▣ Engine independent diesel cab heater, with engine pre-heater. Includes 24 hour timer.
- ▣ Spare tire and wheel with carry bracket
- ▣ Rear mounted stowage box
- ▣ Trailer hitch
- ▣ Outrigger length sensors

**Denotes optional equipment*

Symbols glossary



Axles



Counterweight



Grade



Gear



Boom



Drive



Heavy duty jib



Radius



Boom elevation



Electrical system



Hoist



Rotation



Boom extension



Engine



Hookblock



Speed



Boom length



Extension



Hydraulic system



Steering



Boom nose



Frame



Lights



Suspension



Brakes



Fuel tank capacity



Oil



Swing



Cab



Outriggers



Outrigger controls




Tires



Transmission

Dimensions

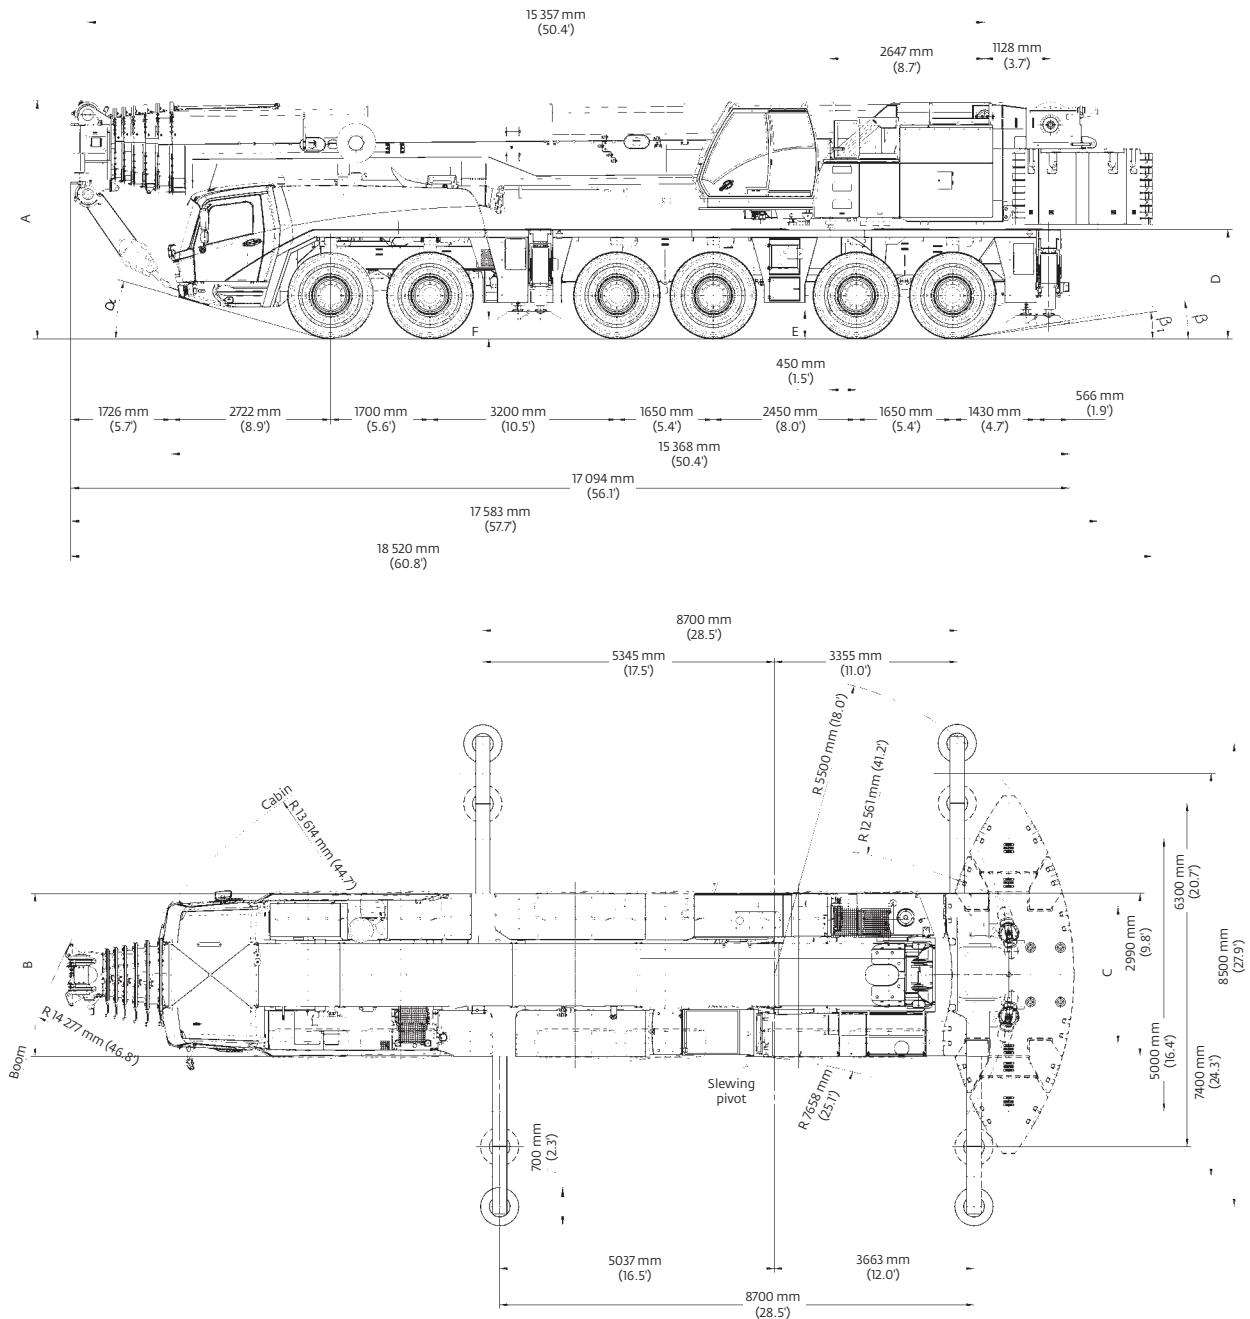


Tires	A	A	B	C	D	E	F	α	β	β_1
14.00 R25	3950 mm (13.0')	3820 mm (12.5')	2970 mm (9.7')	2570 mm (8.4')	1822 mm (6.0')	400 mm (1.3')	297 mm (1.0')	14°	8°	6°
16.00 R25	4000 mm (13.1')	3870 mm (12.7')	2975 mm (9.8')	2510 mm (8.2')	1872 mm (6.1')	450 mm (1.5')	327 mm (1.1')	16°	10°	8°
20.5 R25	4000 mm (13.1')	3870 mm (12.7')	3070 mm (10.1')	2530 mm (8.3')	1872 mm (6.1')	450 mm (1.5')	327 mm (1.1')	16°	10°	8°

Ra = Radius all wheels steered
°Lowered

Weights

Trailing boom - PROVISIONAL

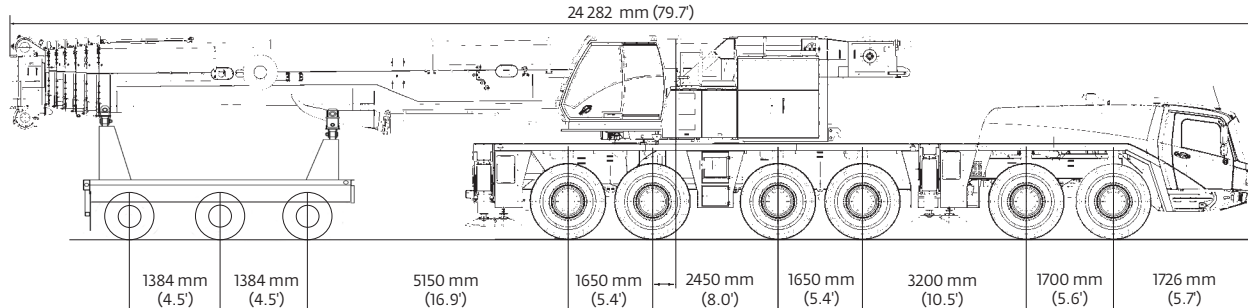

PROVISIONAL



Basic Weights - kg (lb)	Axles 1 and 2		Axles 4 - 6		Three dolly axle		Total	
GMK6300L Mercedes power with 20.5R25 tires, 12x8x12 drive/steer, retarder, 12 m - 21 m (39 ft - 69 ft) hydraulic luffing swingaway, 2nd oil cooler, outrigger pads, auxiliary hoist, driver and tanks filled, 3 axle boom dolly (4536 kg [10,000 lb])	14 334	(31,601)	41 171	(90,767)	25 851	(56,992)	81 356	(179,359)
Additions:								
7000 kg (15,400 lb) base section stowed on carrier	3390	(7474)	3270	(7209)	0	(0)	6660	(14,683)
Removals:								
Brackets for hydraulic swingaway including hose reel	- 41	(-90)	- 112	(-247)	- 303	(-668)	- 456	(-1005)
12 m - 21 m (39 ft - 69 ft) hydraulic swingaway	- 73	(-161)	- 196	(-432)	-1738	(-3832)	-2007	(-4425)
Front outriggers	-1516	(-3342)	- 884	(-1949)	0	(0)	-2400	(-5291)
Rear outriggers	1686	(3717)	-4386	(-9669)	0	(0)	-2700	(-5952)
Front and rear outrigger floats	- 1	(-2)	- 281	(-619)	0	(0)	- 282	(-622)
Substitutions:								
12x6x12 drive/steer	147	(324)	- 537	(-1184)	0	(0)	- 390	(-860)
14.00R25 tires	- 412	(-908)	- 825	(-1819)	0	(0)	-1237	(-2727)
16.00R25 tires	-172	(-379)	- 343	(-756)	0	(0)	- 515	(-1135)

Boom over front -PROVISIONAL

PROVISIONAL

Basic Weights - kg (lb)	Axles 1 and 2		Axles 3 - 6		Total	
Mercedes power, 16.00R25 tires, 12x6x12 drive/steer, retarder, 2nd oil cooler, outrigger pads, driver and tanks filled	22 769	(50,197)	48 740	(107,453)	71 509	(157,650)
Additions:						
12x8x12 drive/steer	- 147	(-324)	537	(1184)	390	(860)
Brackets for hydraulic swingaway	57	(126)	29	(64)	86	(190)
Hose reel + parts for hydraulic swingaway	211	(465)	159	(351)	370	(816)
12 m - 21 m (39 ft - 69 ft) hydraulic swingaway	1840	(4057)	167	(368)	2007	(4425)
Auxiliary hoist	-1427	(-3146)	3263	(7194)	1836	(4048)
7000 kg (15,400 lb) base plate stowed on carrier	3390	(7474)	3270	(7209)	6660	(14,683)
Substitutions:						
14.00R25 tires	- 241	(-531)	- 481	(-1060)	- 722	(-1592)
20.5R25 tires	172	(379)	343	(756)	515	(1135)
Removals:						
Front and rear outrigger floats	- 1	(-2)	- 281	(-619)	- 282	(-622)

Counterweight

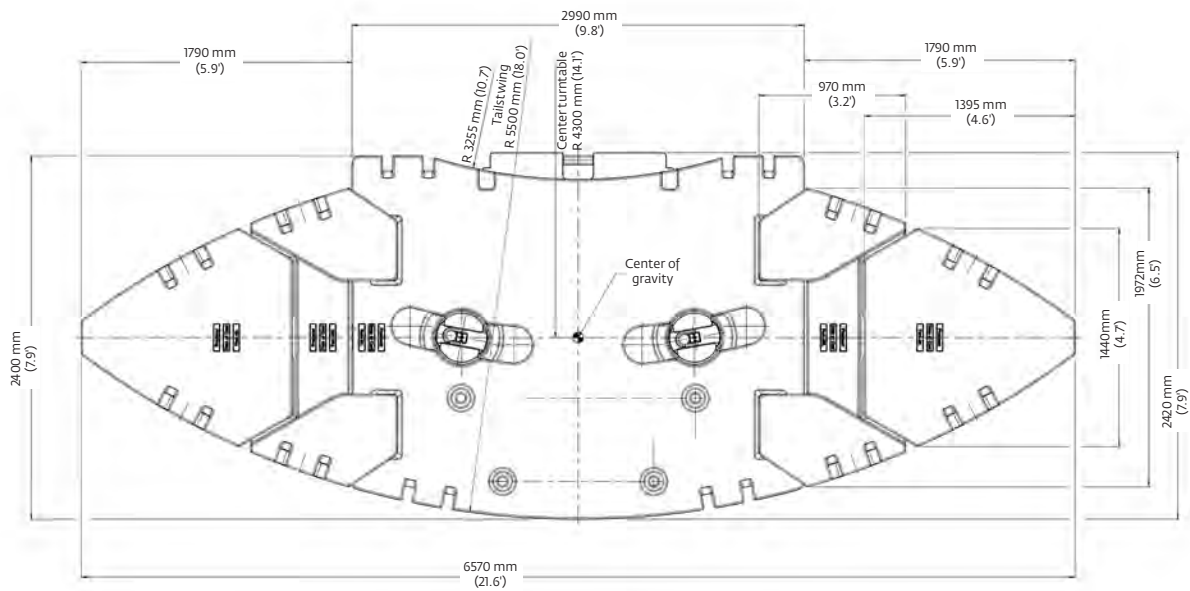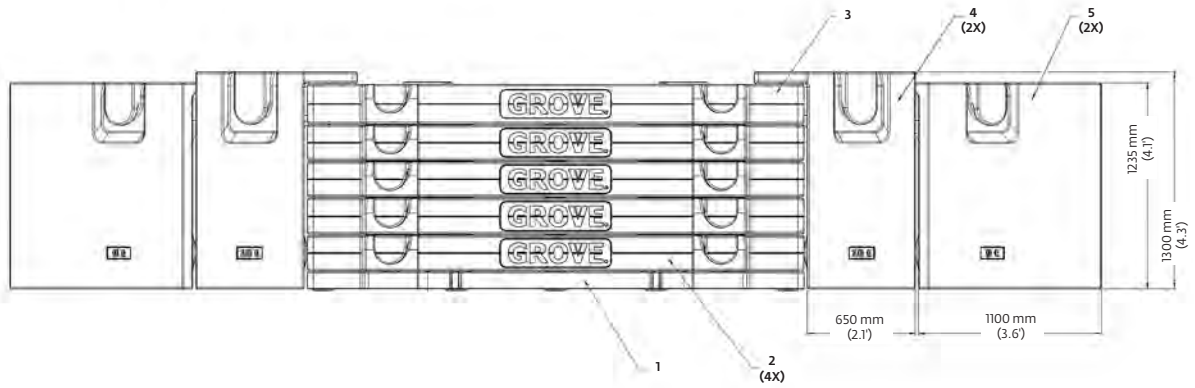

	1 7,0 t (15,430 lb)	2 9,5 t (20,940 lb)	3 9,5 t (20,940 lb)	4 10,0 t (22,050 lb)	5 9,0 t (19,840 lb)
7,0 t (15,400 lb)	X	-	-	-	-
16,5 t (36,300 lb)	X	X	-	-	-
26,0 t (57,300 lb)	X	2 X	-	-	-
35,5 t (78,200 lb)	X	3 X	-	-	-
45,0 t (99,200 lb)	X	4 X	-	-	-
54,5 t (120,100 lb)	X	4 X	X	-	-
74,5 t (164,200 lb)	X	4 X	X	2 X	-
92,5 t (203,900 lb)	X	4 X	X	2 X	2 X