
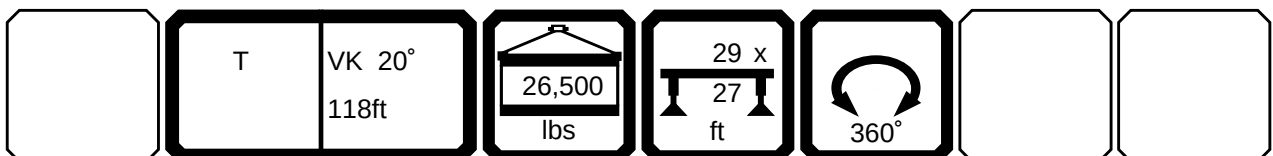


LIEBHERR MODEL LTM 1200/1 - 250 TON CAPACITY


				ft> < lbs		CODE >0274<		L133 0329 .x(x)		
		43	157	171	184					
65	4,900									
70	4,800									
75	4,600									
80	4,400									
85	4,300									
90	4,100									
95	4,000	4,600								
100	3,900	4,600	4,400							
105	3,800	4,600	4,400							
110	3,700	4,500	4,400	4,000						
115	3,600	4,400	4,300	4,000						
120	3,400	4,300	4,200	3,900						
125	3,300	4,200	4,100							
130	3,100	4,100	4,000							
135	2,900	4,100	3,500							
140	2,800	3,700								
145	2,600									
150	2,500									
155	2,400									
160	2,400									
165	2,300									
170	2,300									
* n *	1	1	1	1						
1	0+	0+	46+	92+						
2	0+	92+	92+	92+						
3	0+	92+	92+	92+						
4	0+	92+	92+	92+						
5	0+	92+	92+	92+						
	23	23	23	23						
TAB 133	156	156	156	156						



STERLING CRANE

Folding Fly, Lattice Extension, 20° Offset, 118' Extension



 ft	 ft > < lbs				CODE >0275<		L133 0429 .x(x)			
	43	157	171	184						
65	4,900									
70	4,800									
75	4,600									
80	4,400									
85	4,300									
90	4,100									
95	4,000	4,600								
100	3,900	4,600	4,400							
105	3,800	4,600	4,400							
110	3,700	4,500	4,400	4,000						
115	3,600	4,400	4,300	4,000						
120	3,400	4,300	4,200	4,000						
125	3,300	4,200	4,100	4,000						
130	3,100	4,100	4,100	3,900						
135	2,900	4,100	4,000	3,900						
140	2,800	4,000	3,900	3,800						
145	2,600	3,900	3,800	3,700						
150	2,500	3,900	3,800	3,600						
155	2,400	3,800	3,700	3,600						
160	2,400	3,700	3,700	3,300						
165	2,300	3,700	3,600							
170	2,300	3,600	3,200							
175		3,500	2,700							
180		3,100								
185		2,600								
190		2,200								
* n *	1	1	1	1						
1	0+	0+	46+	92+						
2	0+	92+	92+	92+						
3	0+	92+	92+	92+						
4	0+	92+	92+	92+						
5	0+	92+	92+	92+						
 ft/s	23	23	23	23						
TAB 133	155	155	155	155						

	T	VK 20° 118ft	 52,900 lbs	 29 x 27 ft	 360°		
--	---	-----------------	--	---	--	--	--

STERLING CRANE

Folding Fly, Lattice Extension, 20° Offset, 118' Extension

 ft	 ft > < lbs				CODE >0276<		L133 0529 .x(x)			
	43	157	171	184						
65	4,900									
70	4,800									
75	4,600									
80	4,400									
85	4,300									
90	4,100									
95	4,000	4,600								
100	3,900	4,600	4,400							
105	3,800	4,600	4,400							
110	3,700	4,500	4,400	4,000						
115	3,600	4,400	4,300	4,000						
120	3,400	4,300	4,200	4,000						
125	3,300	4,200	4,100	4,000						
130	3,100	4,100	4,100	3,900						
135	2,900	4,100	4,000	3,900						
140	2,800	4,000	3,900	3,800						
145	2,600	3,900	3,800	3,700						
150	2,500	3,900	3,800	3,600						
155	2,400	3,800	3,700	3,600						
160	2,400	3,700	3,700	3,600						
165	2,300	3,700	3,600	3,500						
170	2,300	3,600	3,600	3,500						
175		3,500	3,500	3,400						
180		3,400	3,500	3,300						
185		3,400	3,400	3,300						
190		3,300	3,300	3,200						
195		3,200	3,200	2,900						
200		3,100	3,100							
205		3,000	3,000							
210		2,900								
215		2,800								
220		2,600								
* n *	1	1	1	1						
1	0+	0+	46+	92+						
2	0+	92+	92+	92+						
3	0+	92+	92+	92+						
4	0+	92+	92+	92+						
5	0+	92+	92+	92+						
 %										
ft/s	23	23	23	23						
TAB 133	154	154	154	154						


	T	VK 20° 118ft	 79,400 lbs	 29 x 27 ft	 360°		
--	---	-----------------	--	---	--	--	--

STERLING CRANE

85%

Folding Fly, Lattice Extension, 20° Offset, 118' Extension

 ft	 ft > < lbs				CODE >0278<		L133 0629 .x(x)			
	43	157	171	184						
65	5,400									
70	5,200									
75	5,100									
80	4,900									
85	4,700									
90	4,600									
95	4,400	5,100								
100	4,300	5,100	4,900							
105	4,200	5,100	4,900							
110	4,100	4,900	4,800	4,400						
115	3,900	4,800	4,700	4,400						
120	3,800	4,700	4,600	4,400						
125	3,600	4,600	4,500	4,400						
130	3,400	4,500	4,500	4,300						
135	3,200	4,500	4,400	4,200						
140	3,100	4,400	4,300	4,200						
145	2,900	4,300	4,200	4,100						
150	2,800	4,200	4,200	4,000						
155	2,700	4,200	4,100	3,900						
160	2,600	4,100	4,000	3,900						
165	2,600	4,000	4,000	3,900						
170	2,500	4,000	3,900	3,800						
175		3,900	3,900	3,700						
180		3,800	3,800	3,700						
185		3,700	3,700	3,600						
190		3,600	3,600	3,600						
195		3,500	3,500	3,500						
200		3,400	3,400	3,400						
205		3,300	3,300	3,300						
210		3,200	3,200	3,200						
215		3,100	3,100	3,200						
220		3,000	3,100	3,000						
225		2,900	3,000	2,700						
230		2,800	2,900							
235		2,800	2,800							
240		2,700	2,500							
* n *	1	1	1	1						
1	0+	0+	46+	92+						
2	0+	92+	92+	92+						
3	0+	92+	92+	92+						
4	0+	92+	92+	92+						
5	0+	92+	92+	92+						
 ft/s	23	23	23	23						
TAB 133	224	224	224	224						


	T	VK 20° 118ft	 99,200 lbs	 29 x 27 ft	 360°		
--	---	-----------------	--	---	--	--	--

STERLING CRANE

85%

Folding Fly, Lattice Extension, 20° Offset, 118' Extension

 ft	 ft > < lbs				CODE >0280<		L133 0729 .x(x)			
	43	157	171	184						
65	5,400									
70	5,200									
75	5,100									
80	4,900									
85	4,700									
90	4,600									
95	4,400	5,100								
100	4,300	5,100	4,900							
105	4,200	5,100	4,900							
110	4,100	4,900	4,800	4,400						
115	3,900	4,800	4,700	4,400						
120	3,800	4,700	4,600	4,400						
125	3,600	4,600	4,500	4,400						
130	3,400	4,500	4,500	4,300						
135	3,200	4,500	4,400	4,200						
140	3,100	4,400	4,300	4,200						
145	2,900	4,300	4,200	4,100						
150	2,800	4,200	4,200	4,000						
155	2,700	4,200	4,100	3,900						
160	2,600	4,100	4,000	3,900						
165	2,600	4,000	4,000	3,900						
170	2,500	4,000	3,900	3,800						
175		3,900	3,900	3,700						
180		3,800	3,800	3,700						
185		3,700	3,700	3,600						
190		3,600	3,600	3,600						
195		3,500	3,500	3,500						
200		3,400	3,400	3,400						
205		3,300	3,300	3,300						
210		3,200	3,200	3,200						
215		3,100	3,100	3,200						
220		3,000	3,100	3,100						
225		2,900	3,000	3,000						
230		2,800	2,900	2,900						
235		2,800	2,800	2,900						
240		2,700	2,700	2,800						
* n *	1	1	1	1						
1	0+	0+	46+	92+						
2	0+	92+	92+	92+						
3	0+	92+	92+	92+						
4	0+	92+	92+	92+						
5	0+	92+	92+	92+						
 %										
ft/s	23	23	23	23						
TAB 133	223	223	223	223						

	T	VK 20° 118ft	 125,700 lbs	 29 x 27 ft	 360°		
--	---	-----------------	---	---	--	--	--

STERLING CRANE

85%

Folding Fly, Lattice Extension, 20° Offset, 118' Extension

[illegible]


The diagram shows a table with dimensions 29' x 27' ft. A load of 125,700 lbs is applied to the table. The table is tilted at an angle of 20° and can rotate 360°. The table is labeled 'T' and 'VK 20°'.

STERLING CRANE

85%

Folding Fly, Lattice Extension, 20° Offset, 118' Extension


 ft	 ft > < lbs				CODE >0282<		L133 0829 .x(x)			
	43	157	171	184						
65	5,400									
70	5,200									
75	5,100									
80	4,900									
85	4,700									
90	4,600									
95	4,400	5,100								
100	4,300	5,100	4,900							
105	4,200	5,100	4,900							
110	4,100	4,900	4,800	4,400						
115	3,900	4,800	4,700	4,400						
120	3,800	4,700	4,600	4,400						
125	3,600	4,600	4,500	4,400						
130	3,400	4,500	4,500	4,300						
135	3,200	4,500	4,400	4,200						
140	3,100	4,400	4,300	4,200						
145	2,900	4,300	4,200	4,100						
150	2,800	4,200	4,200	4,000						
155	2,700	4,200	4,100	3,900						
160	2,600	4,100	4,000	3,900						
165	2,600	4,000	4,000	3,900						
170	2,500	4,000	3,900	3,800						
175		3,900	3,900	3,700						
180		3,800	3,800	3,700						
185		3,700	3,700	3,600						
190		3,600	3,600	3,600						
195		3,500	3,500	3,500						
200		3,400	3,400	3,400						
205		3,300	3,300	3,300						
210		3,200	3,200	3,200						
215		3,100	3,100	3,200						
220		3,000	3,100	3,100						
225		2,900	3,000	3,000						
230		2,800	2,900	2,900						
235		2,800	2,800	2,900						
240		2,700	2,700	2,800						
* n *	1	1	1	1						
1	0+	0+	46+	92+						
2	0+	92+	92+	92+						
3	0+	92+	92+	92+						
4	0+	92+	92+	92+						
5	0+	92+	92+	92+						
 ft/s	23	23	23	23						
TAB 133	222	222	222	222						

	T	VK 20° 118ft	 152,100 lbs	 29 x 27 ft	 360°		
--	---	-----------------	---	---	--	--	--

STERLING CRANE

85%

Folding Fly, Lattice Extension, 20° Offset, 118' Extension

				ft> < lbs		CODE >0282<		L133 0829 .x(x)			
		43	157	171	184						
245			2,600	2,700	2,700						
250			2,600	2,600	2,700						
255			2,500	2,500	2,600						
260			2,400	2,500	2,600						
265			2,300	2,400	2,500						
270			2,300	2,400	2,400						
275			2,200	2,400	2,400						
280				2,300	2,300						