




LIFTING CHARTS - All Terrain Cranes

LIEBHERR MODEL LTM 1500-8.1 - 620 TON CAPACITY

Lifting heights
Hauteurs de levage

TY3ENZF

276 ft

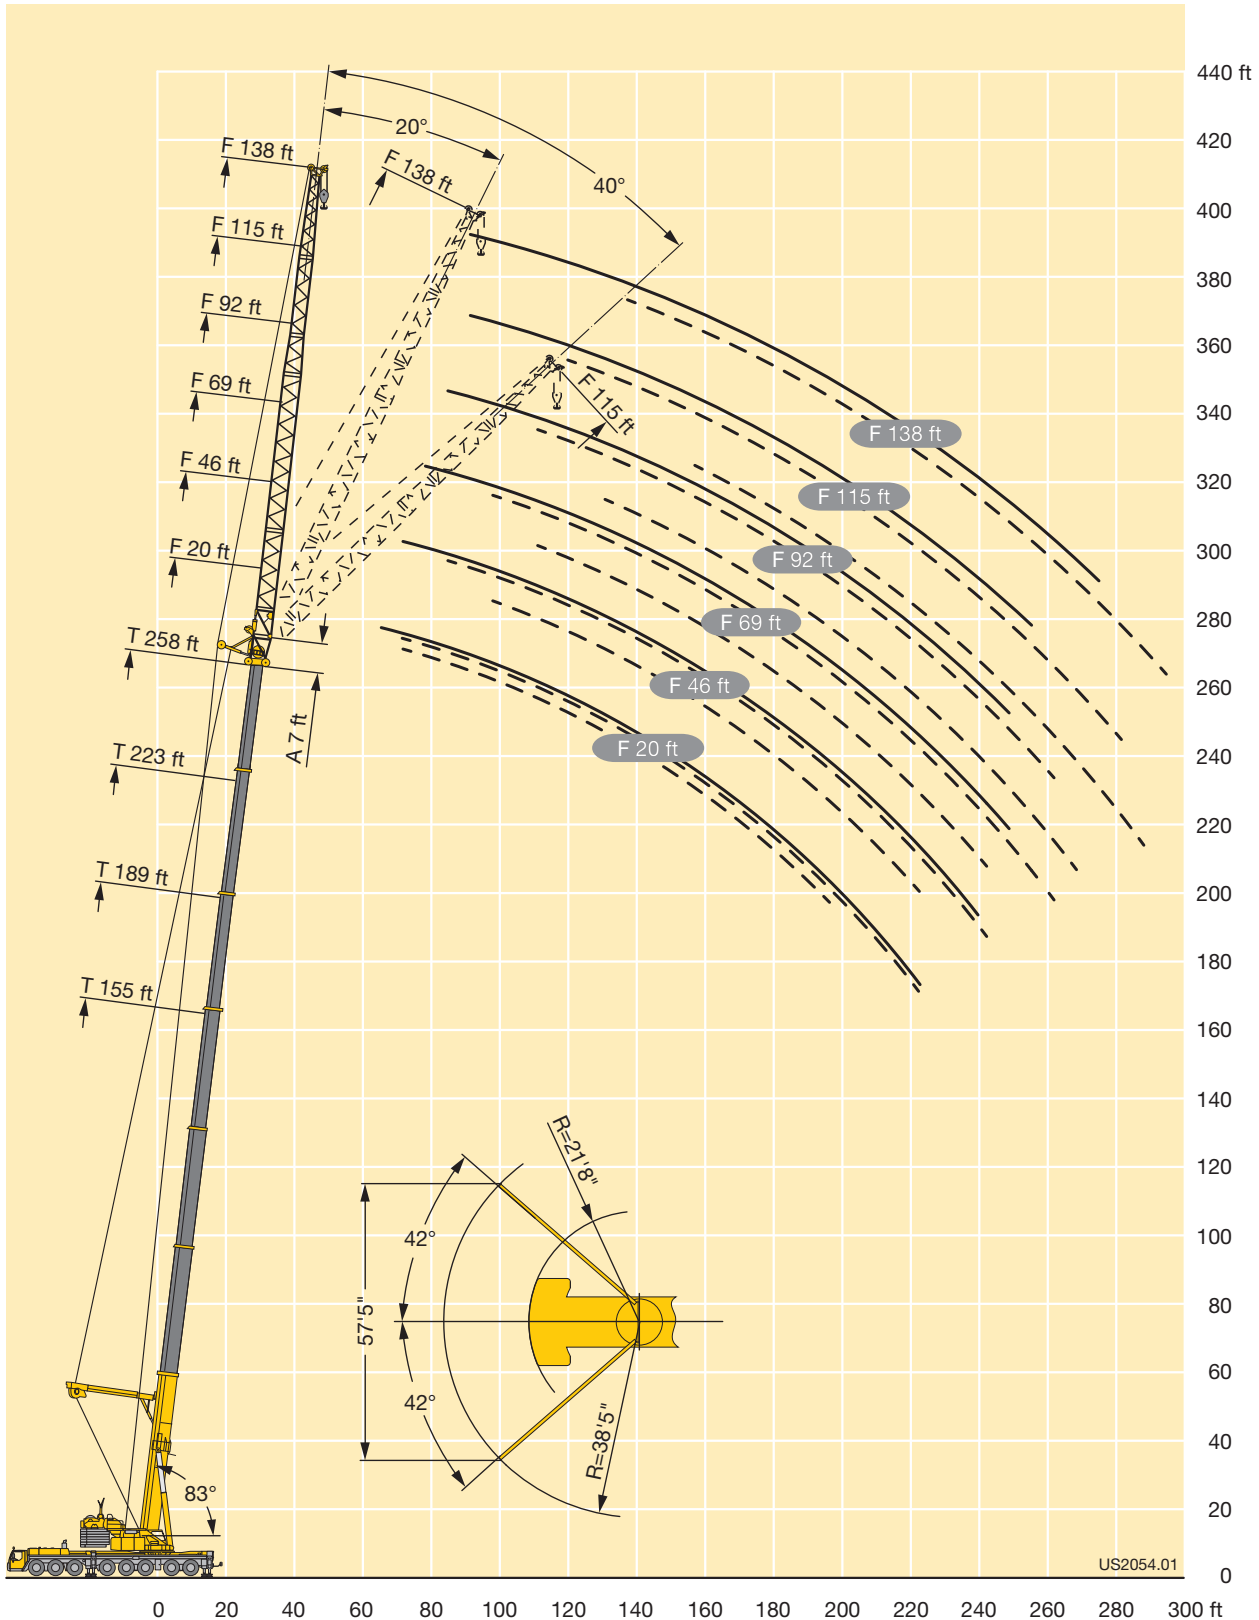

STERLING CRANE

Lifting capacities Forces de levage

TY3ENZF

276 ft

155 – 258 ft T Y3 E 20 – 184 ft NZF 360° 363800 lbs 85%																				
ft	155 ft + 7 ft*																		ft	
	20 ft**			46 ft			69 ft			92 ft			115 ft			138 ft		161 ft		184 ft
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	0°	0°	
28	226																			28
30	225																			30
32	222																			32
34	219																			34
36	216																			36
38	214	159		178			129													38
40	211	158		177			128													40
45	205	150	103	168			122			92										45
50	189	143	101	160	99.5		116			88			69			57.3				50
55	173	136	98.5	153	98.5		110			83.5			67.5			56		43.1		55
60	159	130	96	146	97		105			80			64			53.3		42.8		60
65	147	125	94	140	94	62	100	60		76			61.5			51		40.8	32.8	65
70	137	120	92	132	91.5	62	96	59.7		73			58.6			48.8		39.1	31.6	70
75	127	116	90.5	123	89	61	92	59.3		70	39.5		56.2			46.7		37.5	30.3	75
80	118	111	89	115	86.5	60	88.5	58.7	36.4	67	39.4		54			44.7		35.9	29	80
85	109	108	87	108	84	59.2	85.5	57.9	36.7	64	38.9		51.8	30.2		43		34.3	27.8	85
90	100	102	86	101	82	58.3	82.5	57.1	37.1	62	38.4		49.6	30.2		41.3		33.1	26.6	90
95	92	95	84.5	94.5	80	57.6	79.5	56.1	37.3	59.9	38		47.8	30.2		39.6	25.6	31.9	25.5	95
100	84	87	83.5	87.5	78.5	56.9	76.5	54.9	37.2	57.7	37.7	21.8	46.2	30.2		38.1	25.4	30.6	24.5	100
105	77	79.5	81.5	81	76.5	56.2	73.5	53.6	36.8	55.6	37.3	22	44.6	30.2		36.8	24.9	29.4	23.6	105
110	70.5	73	75	75.5	75	55.6	71.5	52.3	36.4	53.5	37	22.2	43.1	30.2		35.6	24.4	28.3	22.6	110
115	64.5	67	68.5	69.5	73	55	69	51	35.9	51.7	36.6	22.4	41.5	30.2		34.4	23.9	27.3	21.7	115
120	59.1	61.5	62.5	64	69.5	54.5	66	49.8	35.4	50.1	36.3	22.6	40	30.2	17	33.1	23.4	26.4	20.8	120
125	54	56		59	64	54	62	48.8	34.9	48.5	36	22.8	38.6	30.1	17	31.9	23	25.5	20.1	125
130	49.4	51.3		54.4	59.1	53.7	58	47.7	34.4	46.9	35.6	22.9	37.5	29.5	17.1	30.7	22.6	24.6	19.4	130
135	45.1	46.8		50.2	54.5	53.4	53.9	46.7	34	45.3	35.2	22.8	36.4	28.8	17.1	29.7	22.3	23.7	18.7	135
140	41.1	42.7		46.2	50.2	51.9	49.9	45.7	33.6	43.8	34.5	22.6	35.2	28.1	17	28.9	21.8	22.8	18	140
145	37.4	38.8		42.4	46.2	48.7	46.2	44.8	33.2	42.6	33.8	22.4	34.1	27.4	16.9	28	21.3	22	17.3	145
150	34	35.2		39	42.5	44.7	42.7	44	32.9	41.4	33.1	22.3	32.9	26.7	16.7	27.2	20.7	21.3	16.6	150
155	30.8	31.9		35.8	39		39.5	43.2	32.7	40.2	32.3	22	31.9	26.1	16.4	26.3	20	20.7	16	155
160	27.4			32.7	35.7		36.4	41.2	32.5	38.5	31.6	21.7	31	25.5	16.1	25.5	19.4	20	15.4	160
165	23.2			29.9	32.6		33.6	38.1	32.3	36.3	31	21.5	30	24.9	15.8	24.6	18.8	19.3	14.9	165
170	16.3			27.2	29.7		30.9	35.1	32.1	33.6	30.4	21.2	29.1	24.3	15.5	23.8	18.3	18.7	14.3	170
175				24.7	26.9		28.4	32.3	32	31.1	29.8	21	28.2	23.6	15.3	23.1	17.8	18	13.8	175
180				22.4	24.3		26	29.6		28.7	29.2	20.9	27.2	23.1	15.1	22.3	17.4	17.4	13.3	180
185				19.7			23.7	27.1		26.4	28.7	20.7	26.3	22.6	14.8	21.5	16.9	16.8	12.7	185
190				15.8			21.6	24.7		24.2	28.2	20.5	25.5	22.2	14.6	20.8	16.4	16.2	12.2	190
195							19.6	22.4		22.2	26.4	20.5	24.4	21.7	14.4	20	16	15.6	11.7	195
200							17.7	20.1		20.3	24.4		22.8	21.3	14.3	19.3	15.6	15	11.3	200
205							15.4	18		18.5	22.3		20.9	20.8	14.1	18.6	15.2	14.4	10.9	205
210							12.2			16.7	20.2		19.2	20.4	14	18.1	14.9	13.8	10.5	210
215							8.8			15.1	18.3		17.5	20.1	13.9	17.5	14.5	13.2	10.1	215
220										13.4	16.4		15.9	19.5	13.9	16.9	14.2	12.7	9.7	220
225										11.7	14.6		14.4	18.4		15.9	13.8	12.3	9.3	225
230										9.6			13	16.7		14.4	13.5	11.9	8.9	230
235										6.9			11.7	15		12.9	13.3	11.5	8.5	235
240													10.6	13.3		11.8	13.1	11.2	8.2	240
245													9.3	11.8		10.8	12.8	10.8	7.9	245
250													7.5	10.6		9.8	12.5	10.4	7.6	250
255													5.3	9.4		8.8	11.7	9.6	7.3	255
260																7.9	10.6	8.8	7	260
265																6.6	9.5	7.9	6.8	265
270																	8.4	7	6.5	270
275																	7.2	5.9	6.2	275
280																		4.9	5.8	280
285																			5.1	285
290																			4.1	290
295																			3.1	295

* adapter · pièce d'adaptateur

** optional · en option


TAB 232110 / 232119 / 232128

STERLING CRANE

Lifting capacities Forces de levage

TY3ENZF

276 ft



	189 ft + 7 ft*																			
	20 ft**			46 ft			69 ft			92 ft			115 ft			138 ft		161 ft	184 ft	
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	0°	0°	
38	199																			38
40	198																			40
45	189	149		163																45
50	175	145	101	158			112			86										50
55	161	140	100	150	98		110			84			63			52.1				55
60	148	135	98	141	97.5		106			80.5			62.5			51.8				60
65	137	131	96	131	95		102			77.5			60			49.7		39.2		65
70	128	126	94.5	122	92.5		98	60		74.5			57.9			47.7		38	30.2	70
75	119	120	92.5	114	90	61	94.5	60		71.5			55.7			45.9		36.5	30.2	75
80	111	113	91	107	88	60.5	91	60		69			53.7			44.3		35.1	30	80
85	104	106	89.5	100	86	59.7	88	60		66.5	40.3		51.6			42.7		33.9	29.2	85
90	97.5	99	88.5	94	84	58.9	85	60		64.5	40.1		50			41.1		32.7	28.2	90
95	91.5	93	87	88.5	82	58.2	82.5	59.3	36	62.5	40		48.3	30.2		39.7		31.5	27.2	95
100	85	87	85.5	83	80.5	57.5	79.5	58.1	36.5	60	39.9		46.7	30.2		38.4		30.3	26.2	100
105	79	81.5	83	78.5	79	56.8	76.5	56.7	37	58.4	39.7	21.8	45.1	30.2		37.1		29.4	25.2	105
110	73	76	77.5	73.5	76.5	56.3	72.5	55.4	36.8	56.8	39.4	22.1	43.7	30.2		35.9	24.5	28.4	24.3	110
115	67.5	70	72	69	73	55.8	68.5	54.3	36.4	55.1	39	22.5	42.4	30.2		34.7	24.3	27.5	23.5	115
120	62.5	65	66.5	64	69	55.2	64.5	53.2	36	53.5	38.6	22.8	41.2	30.2		33.6	24.1	26.5	22.7	120
125	57.7	60	61.5	59.5	64.5	54.7	60.5	52	35.5	51.8	38.2	23.2	40	30.2	16.1	32.7	23.8	25.6	21.9	125
130	53.2	55.2	56.6	55.4	60	54.3	56.4	51	35.1	50.2	37.5	23.2	38.8	30.2	16.3	31.7	23.5	24.9	21.1	130
135	48.9	50.8	52	51.5	56.1	53.9	52.7	49.9	34.7	48.9	36.7	23.2	37.6	29.7	16.5	30.8	23.1	24.2	20.4	135
140	44.9	46.7	47.8	47.9	52.3	53.2	49.2	49	34.3	47.7	36	23.2	36.5	29.2	16.7	29.9	22.6	23.4	19.7	140
145	41.2	42.9	43.8	44.5	48.6	51.5	45.9	48.1	33.8	46.3	35.2	23.1	35.5	28.6	16.9	28.9	22	22.7	19.1	145
150	37.7	39.3	40.2	41	44.9	47.6	42.8	47.3	33.5	43.6	34.5	22.8	34.6	28	16.7	28	21.5	22	18.5	150
155	34.5	36		37.8	41.5	43.9	39.9	45.1	33.2	40.9	33.8	22.5	33.8	27.3	16.6	27.3	20.9	21.3	18	155
160	31.5	32.9		34.8	38.2	40.5	37.2	42.4	32.9	38.2	33.2	22.2	32.9	26.7	16.4	26.6	20.4	20.6	17.4	160
165	28.6	29.9		32	35.2	37.2	34.5	39.4	32.7	35.7	32.6	21.9	32	26.1	16.2	25.9	19.9	20	16.8	165
170	25.4	27.1		29.3	32.3	34.2	31.8	36.5	32.4	33.3	31.9	21.6	31.2	25.5	16	25.2	19.4	19.4	16.2	170
175	22.5	24.3		26.8	29.6	31.3	29.3	33.8	32.2	31	31.3	21.4	30.3	25	15.7	24.5	18.9	18.9	15.6	175
180	19.8	21.3		24.4	27.1		26.9	31.1	32.1	28.9	30.7	21.2	29.3	24.5	15.5	23.9	18.4	18.4	15.1	180
185	17.2	18.4		22.2	24.6		24.7	28.7	31.4	26.7	30.1	21	28.1	24	15.2	23.2	17.9	17.9	14.7	185
190	14.5	15.7		20.1	22.3		22.6	26.3	28.8	24.6	29.5	20.8	26.2	23.5	15	22.5	17.5	17.4	14.3	190
195	11.9			18.1	20.2		20.6	24.1	26.3	22.6	27.5	20.7	24.4	23	14.8	21.8	17.1	16.9	13.8	195
200				16.2	18.1		18.7	22		20.7	25.4	20.5	22.6	22.6	14.7	21.2	16.7	16.3	13.4	200
205				14.4	16.1		16.8	19.9		18.8	23.3	20.4	20.9	22.2	14.5	20.5	16.3	15.8	13	205
210				12.5	14.2		15.1	18		17.1	21.3	20.3	19.1	21.8	14.3	19.8	15.9	15.3	12.5	210
215				10.7	12.4		13.5	16.2		15.5	19.4	20.2	17.5	21.4	14.2	18.4	15.5	14.9	12.1	215
220				8.3			12	14.4		13.9	17.7	19.5	15.9	20.5	14.1	16.9	15.2	14.4	11.7	220
225							10.8	12.7		12.5	15.9		14.4	19.1	14	15.4	14.9	13.9	11.4	225
230							9.6	11.2		11.2	14.2		12.9	17.4	13.9	13.9	14.6	13.5	11	230
235							7.7	10		10.1	12.6		11.7	15.8	13.8	12.5	14.3	13	10.6	235
240							5.7			9	11.3		10.6	14.3	13.7	11.4	14	12.3	10.3	240
245										7.9	10.1		9.6	12.8		10.4	13.7	11.4	9.9	245
250										6.6	9		8.6	11.5		9.4	13.3	10.4	9.6	250
255										5.2	7.8		7.6	10.4		8.4	12.1	9.3	9.2	255
260											6.3		6.4	9.3		7.4	11	8.3	8.4	260
265													5.3	8.2		6.4	10	7.3	7.5	265
270														7.1		5.4	9	6.3	6.5	270
275														5.8		4.3	8	5.4	5.6	275
280														4.5			6.9	4.5	4.7	280
285																	5.8		3.8	285
290																	4.6			290
295																	3.4			295

* adapter · pièce d'adaptateur
** optional · en option


TAB 232110 / 232119 / 232128

STERLING CRANE

Lifting capacities Forces de levage

TY3ENZF

276 ft



	223 ft + 7 ft*																			
	20 ft**			46 ft			69 ft			92 ft			115 ft			138 ft		161 ft	184 ft	
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	0°	0°	
50	145																			50
55	141	133		118																55
60	134	132		117																60
65	127	126	95.5	112			93.5			71										65
70	119	120	94	107			91			69			54.8							70
75	111	113	92.5	102	88.5		88			67			53.8			41.6				75
80	104	106	91	97.5	88		84.5			65			52.1			41.2				80
85	97.5	99	90	93	86	59.1	81	60		63			50.5			39.9		31.3		85
90	91.5	93	88.5	88	84.5	58.4	77.5	59.4		61			49.1			38.7		30.3	25.5	90
95	86.5	87.5	87	83	82	57.8	74.5	58.4		59.4			47.6			37.6		29.4	25	95
100	81.5	82.5	84	78	79.5	57.2	71.5	57.2	35.6	57.8	39.5		46.2			36.5		28.5	24.2	100
105	76.5	78	79.5	73.5	76.5	56.6	69	56	36.6	56.3	39.8		44.9			35.3		27.6	23.4	105
110	70	73.5	75	69.5	72.5	56.1	66	54.9	36.6	54.8	39.4		43.7	30.2		34.3		26.8	22.7	110
115	65	69	70.5	66	68.5	55.6	63.5	53.8	36.3	53.3	39		42.5	30.2		33.4		26	22	115
120	60	64	66.5	62	65	55.1	60.5	52.8	35.9	51.8	38.6	21.9	41.4	30.2		32.5	23.6	25.2	21.3	120
125	55.9	59.3	62	58.8	61.5	54.7	57.4	51.8	35.5	50.3	38	22.4	40.2	30.2		31.6	23.6	24.5	20.6	125
130	51.7	54.7	57.5	55	58.4	54.3	54.5	50.8	35.1	48.9	37.3	22.7	39.2	30.1		30.7	23.3	23.8	20	130
135	47.5	50.1	53	51.4	55.4	53.9	51.5	50	34.7	47.3	36.6	23.1	38.3	29.6		29.9	22.9	23.2	19.4	135
140	43.5	46.1	48.7	47.9	52.2	53.2	48.4	49.2	34.4	45.8	35.8	23.2	37.4	29.1	15.9	29.1	22.4	22.5	18.9	140
145	40	42.7	44.8	44.7	48.8	51.9	45.3	48.3	34.1	44.3	35.1	23.1	36.6	28.5	16.2	28.4	21.9	21.8	18.3	145
150	36.9	39.3	41.2	41.7	45.6	48.7	42.4	47.2	33.8	42.5	34.6	22.8	35.7	27.9	16.4	27.8	21.4	21.3	17.7	150
155	33.9	35.9	37.7	38.8	42.6	45.5	39.6	44.9	33.5	40	34	22.5	34.8	27.3	16.5	27.1	20.9	20.7	17.1	155
160	30.8	32.6	34.3	36.1	39.7	42.4	37	42.3	33.2	37.5	33.4	22.2	33.9	26.8	16.4	26.4	20.5	20.2	16.6	160
165	27.8	29.4	31.1	33.6	36.9	39.5	34.5	39.6	32.9	35.1	32.8	22	33	26.3	16.3	25.7	20	19.7	16.2	165
170	24.8	26.8	28.2	31.1	34.4	36.8	32.2	37	32.7	32.8	32.3	21.8	32	25.9	16	25	19.6	19.2	15.8	170
175	22.3	24.2		28.6	31.9	34	30	34.6	32.5	30.7	31.7	21.6	30.7	25.4	15.8	24.3	19.2	18.7	15.4	175
180	20	21.6		26.1	29.5	31.4	27.9	32.3	32.3	28.7	31.1	21.3	29	25	15.6	23.5	18.8	18.1	14.9	180
185	17.8	19.1		23.5	27.1	28.8	25.8	30.1	31.9	26.7	30.5	21.1	27.1	24.5	15.4	22.7	18.4	17.6	14.5	185
190	15.5	16.5		20.9	24.8	26.4	23.9	27.9	30.9	24.8	29.9	20.9	25.3	24.1	15.2	21.9	18	17.2	14.1	190
195	13.2	14.3		18.9	22.6	24.1	21.6	25.9	28.6	23	28.1	20.8	23.6	23.7	15	21.2	17.6	16.8	13.6	195
200	11	12.1		17	20.5		19.4	23.8	26.3	21.3	26.3	20.6	21.9	23.3	14.8	20.4	17.2	16.4	13.2	200
205	8.9	10		15	18.4		17.2	21.8	24.2	19.7	24.4	20.5	20.3	22.9	14.7	19.6	16.8	16	12.8	205
210	7	7.9		13	16.3		15.2	19.9	22.1	18.1	22.7	20.4	18.8	22.5	14.5	18.8	16.4	15.6	12.5	210
215	5.1	5.8		11.1	14.2		13.5	18.1	20.1	16.5	20.9	20	17.3	22.1	14.4	17.4	16.1	15.2	12.2	215
220				9.1	12.2		11.7	16.4	18.2	14.8	19.1	19.3	15.9	21.1	14.2	16.1	15.8	14.8	11.8	220
225				7.3	10.1		10	14.7		13.2	17.4	18.5	14.6	19.6	14.1	14.8	15.5	14.5	11.5	225
230				5.9	8.1		8.3	13.1		11.6	15.8	17.6	13.2	18.1	14	13.5	15.2	14	11.2	230
235				4.6	6.4		6.6	11.2		10.1	14.3	16.5	11.9	16.5	13.8	12.3	14.9	12.8	10.9	235
240					4.8		4.9	9.3		8.5	12.8	15	10.8	15	13.7	11.1	14.6	11.7	10.5	240
245								7.4		7	11.5		9.7	13.5	13.6	10	14.2	10.6	10.1	245
250								5.6		5.5	10.3		8.5	12.1	13.5	8.9	13.6	9.5	9.3	250
255								4.4		4	8.7		7.3	11.1	13.3	7.9	12.4	8.5	8.3	255
260											7		5.9	10.1	12.2	6.8	11.4	7.5	7.4	260
265											5.3		4.6	9	10.9	5.8	10.3	6.5	6.4	265
270														7.9		4.9	9.2	5.6	5.5	270
275														6.7		4	8.1	4.7	4.6	275
280														5.4			7.1	3.8	3.8	280
285																	6			285
290																	5			290
295																	4			295

* adapter · pièce d'adaptateur

** optional · en option

TAB 232110 / 232119 / 232128

STERLING CRANE

Lifting capacities Forces de levage

TY3ENZF

276 ft



 ft	258 ft + 7 ft*																	 ft	
	20 ft**			46 ft			69 ft			92 ft			115 ft			138 ft			
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°		
65	85																	65	
70	82	76.5	73.5	67														70	
75	78.5	75	72	66			53.2											75	
80	75	72.5	70	63.5			52.8											80	
85	72	70	67.5	61.5	55.3		51			41.3								85	
90	68	67.5	65.5	59.3	53.7		49.4			40				33.5			30.2	90	
95	64.5	64.5	63.5	57.3	52.2	46.6	47.8	41		38.7				32.8			30	95	
100	61	62	61.5	55.5	50.7	46.5	46.3	40.8		37.5				31.7			29.5	100	
105	57.1	59.4	59.2	53.8	49.2	46.1	44.8	40		36.2				30.7			28.6	105	
110	54.2	56.4	56.7	52.1	47.8	45.2	43.4	39	28.4	35.1	25.5			29.7			27.7	110	
115	51.3	53.5	54.1	50.3	46.5	44.3	42.1	38	28.4	34	25.3			28.8			26.9	115	
120	48.5	50.4	51.5	48.5	45.3	43.4	40.8	37	28.4	32.9	25			27.8	19.6		26.1	120	
125	45.7	47.4	48.8	46.7	44	42.4	39.5	35.9	28.4	32	24.7			26.9	19.6		25.2	125	
130	42.8	44.4	46	44.8	42.8	41.3	38.4	35	28.5	31	24.5	16.4		26.1	19.3		24.4	130	
135	40.3	41.8	43.2	42.9	41.7	40.3	37.3	34.1	28.5	30	24.2	16.4	25.4	19			23.7	16.2	135
140	38	39.5	40.6	41	40.7	39.3	36.2	33.2	28.5	29.1	23.9	16.4	24.6	18.7			23	16.1	140
145	36	37.3	38.2	39.1	39.6	38.4	35.2	32.3	28.6	28.3	23.7	16.4	23.8	18.5			22.4	15.8	145
150	34	35	36	37.3	38.6	37.5	34.1	31.5	28.6	27.5	23.4	16.5	23	18.3	11.5		21.7	15.5	150
155	31.9	32.8	33.8	35.4	37.6	36.6	33.1	30.8	28.6	26.7	23.2	16.5	22.3	18	11.5	21	15.3		155
160	29.9	30.6	31.7	33.6	36.4	35.8	32	30	28.4	25.9	22.9	16.5	21.7	17.8	11.5	20.3	15.1		160
165	27.8	28.5	29.5	31.7	35	34.8	30.8	29.3	27.9	25.1	22.7	16.6	21.1	17.6	11.5	19.8	14.8		165
170	25.7	26.3	27.4	29.9	33.2	33.6	29.2	28.6	27.3	24.3	22.1	16.6	20.5	17.4	11.5	19.3	14.6		170
175	23.5	24.2	25.2	28	31.4	32.1	27.7	27.9	26.7	23.5	21.6	16.7	19.8	17.2	11.5	18.7	14.4		175
180	21.4	22.1	23.1	26.1	29.6	30.5	26.2	27	26.1	22.5	21.1	16.7	19.2	17	11.6	18.2	14.3		180
185	19.2	20	21	24.2	27.8	29	24.6	26	25.5	21.2	20.5	16.7	18.6	16.7	11.6	17.6	14.1		185
190	17	17.9	18.8	22.2	26	27.4	23.1	24.9	24.9	19.9	20	16.7	17.9	16.4	11.6	17.1	13.9		190
195	14.9	15.9	16.6	20.1	24	25.8	21.5	23.9	24.1	18.7	19.5	16.7	17.1	16.1	11.7	16.5	13.7		195
200	12.9	14		18.1	21.9	23.8	19.9	22.8	23.3	17.4	18.8	16.6	16.2	15.7	11.7	16	13.5		200
205	11.2	12		16.1	19.7	21.6	18.1	21.7	22.5	16.2	18.1	16.6	15.4	15.4	11.7	15.5	13.3		205
210	9.5	10.1		14	17.6	19.3	16.4	20.6	21.7	14.9	17.2	16.6	14.5	15.1	11.8	15.1	13.1		210
215	7.8	8.1		12	15.5	17.1	14.7	19.1	20.9	13.6	16.4	16.1	13.7	14.8	11.8	14.7	12.9		215
220	6.1	6.4		10.3	13.3	14.9	12.9	17.4	19.6	12.3	15.6	15.7	12.8	14.3	11.9	14.3	12.7		220
225		5		8.8	11.3		11.2	15.6	17.9	10.9	14.7	15.2	12	13.9	11.9	13.8	12.5		225
230				7.3	9.6		9.4	13.7	16	9.6	13.9	14.8	11.1	13.4	11.9	13.4	12.3		230
235				5.9	7.9		7.8	12	14.1	8.3	12.8	14.3	9.8	12.9	11.8	12.4	12.1		235
240				4.4	6.3		6.7	10.2	12.2	6.9	11.5	13.6	8.5	12.4	11.6	11.3	11.8		240
245							5.7	8.5		5.6	10	12.5	7.3	11.9	11.3	10.2	11.5		245
250							4.8	7.1			8.6	11	6	11.3	11.1	9.2	11.2		250
255							3.9	6			7.3	9.6	4.7	10.5	10.8	8.2	10.8		255
260								4.9			5.9	8.1		9.3	10.6	7.2	10.5		260
265											4.5	6.6		8.1	9.8	6.3	10.2		265
270														6.8	8.7	5.2	9.8		270
275														5.6	7.5	3.9	8.8		275
280														4.4	6.3		7.8		280
285															5.2		6.7		285
290																	5.7		290
295																	4.5		295
300																	3.3		300

* adapter · pièce d'adaptateur
** optional · en option

TAB 232110 / 232119 / 232128