



LIFTING CHARTS - Crawler Cranes

KOBELCO MODEL CK1000-III - 100 TON CAPACITY

Boom and Jib Arrangement


Boom Arrangement

Boom	Insert Boom				Aux Sheave	Fixed Jib
	10 ft	20 ft	40ft (40)	40 ft (40A)		
40 ft	—	—	—	—	Y1	
50 ft	1	—	—	—	Y1	
60 ft	2	—	—	—	Y1	
70 ft	1	1	—	—	Y1	
80 ft	2	1	—	—	Y1	
	—	—	—	1	Y1	Y2
90 ft	1	2	—	—	Y1	
	1	—	—	1	Y1	Y2
100 ft	2	2	—	—	Y1	
	2	—	—	1	Y1	Y2
110 ft	1	1	—	1	Y1	Y2
120 ft	2	1	—	1	Y1	Y2
130 ft	1	2	—	1	Y1	Y2
140 ft	2	2	—	1	Y1	Y2
150 ft	1	1	1	1	Y1	Y2
160 ft	2	1	1	1	Y1	Y2
170 ft	1	2	1	1	Y1	Y2
180 ft	2	2	1	1	Y1	Y2
190 ft	1	1	2	1	Y1	Y2
200 ft	2	1	2	1		

Y1: Auxiliary sheave can be attached.
Y2: Fixed jib can be attached.
To install fixed jib, one 40A (40 ft insert boom with lug) is required.

Jib Arrangement

Jib	Insert Jib	
	10 ft	20 ft
30 ft	—	—
40 ft	1	—
50 ft	—	1
60 ft	1	1

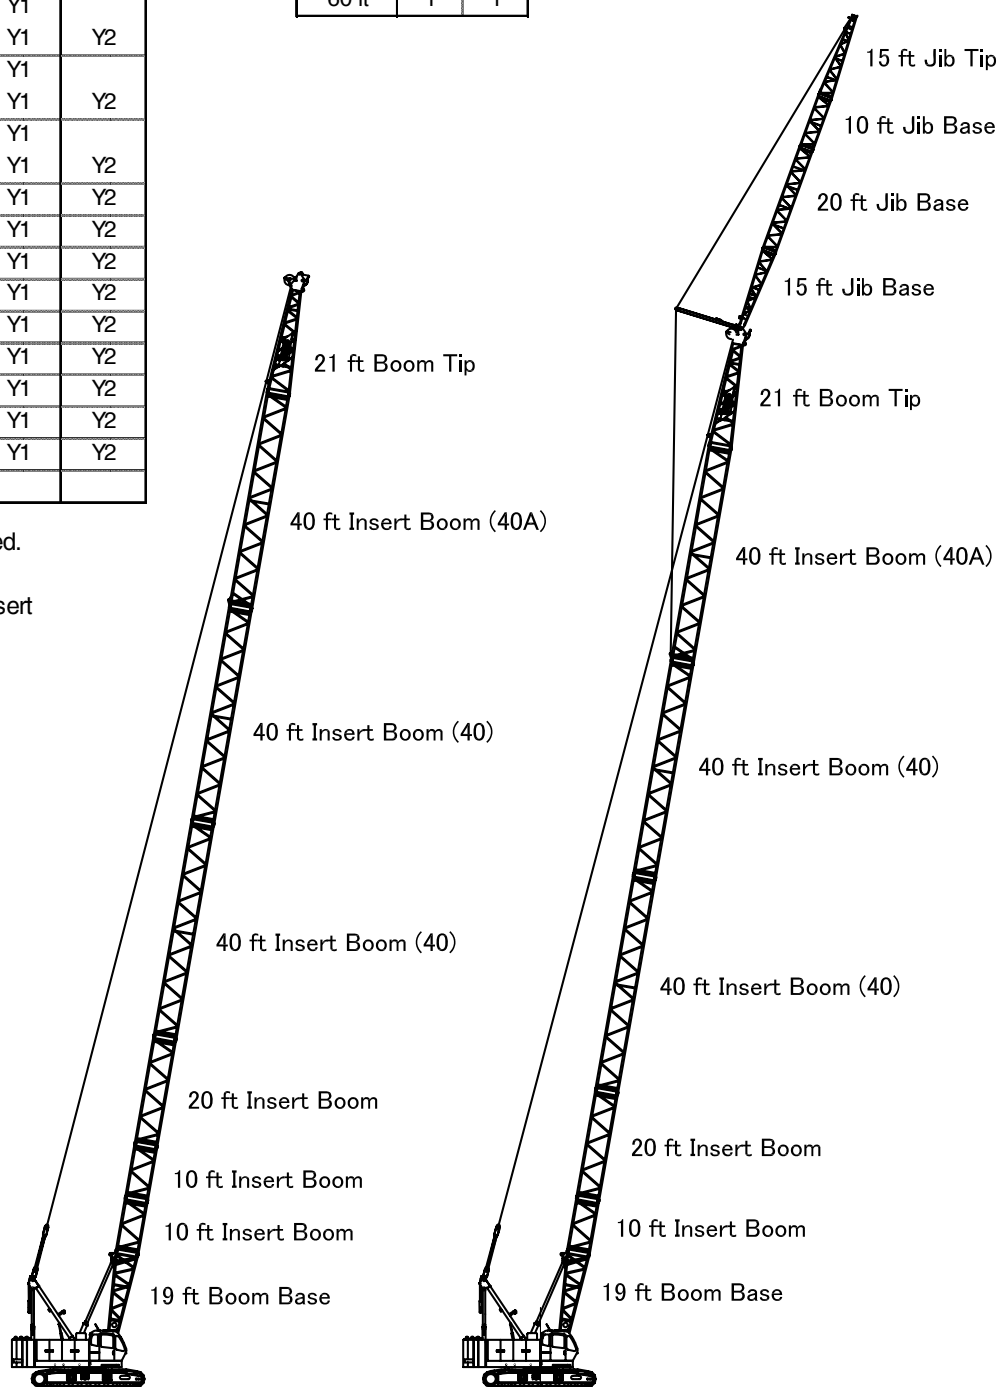

200 ft (61.0 m) Main Boom

190 ft (57.9 m) Main Boom
and 60 ft (18.3 m) Fixed Jib